


© Copyright NHP 2018

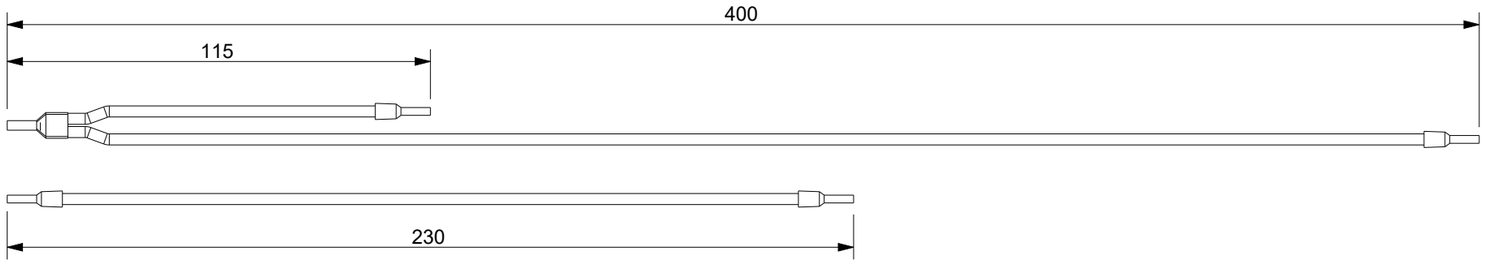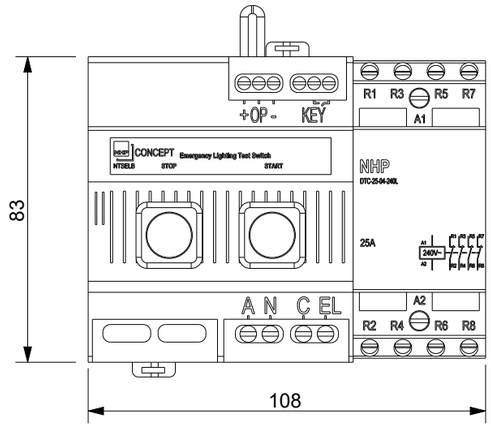


LABELS SUPPLIED LOOSE

- WARNING: INTERRUPTING SUPPLY WILL DISCHARGE EMERGENCY LIGHTING BATTERIES
- WARNING: INTERRUPTING SUPPLY WILL DISCHARGE EMERGENCY LIGHTING BATTERIES
- WARNING: INTERRUPTING SUPPLY WILL DISCHARGE EMERGENCY LIGHTING BATTERIES
- WARNING: INTERRUPTING SUPPLY WILL DISCHARGE EMERGENCY LIGHTING BATTERIES

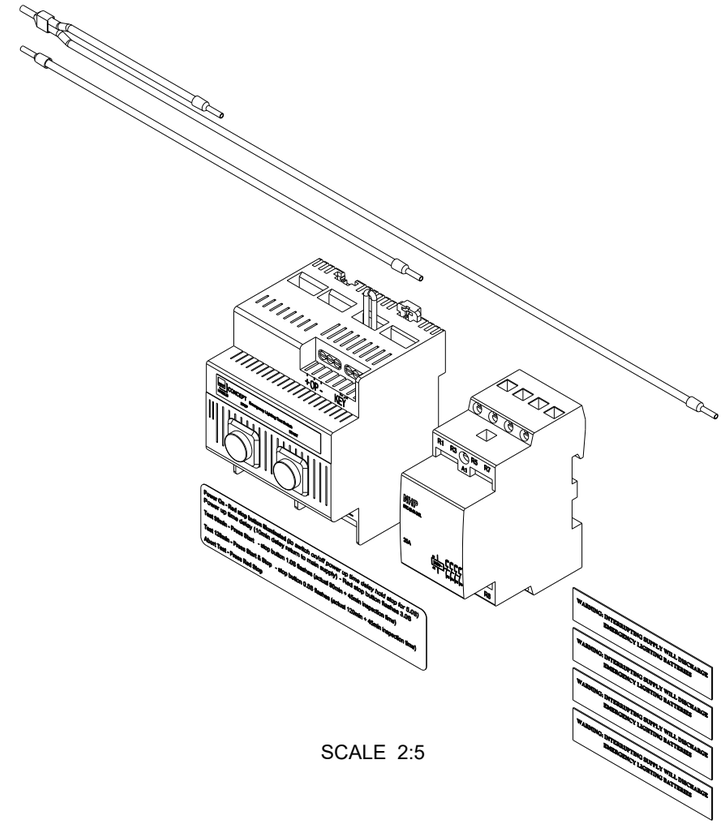

SCALE 2:5

## CONSTRUCTION NOTES EMERGENCY LIGHTING TEST KIT

| | | |
|---|---|---|
| ENCLOSURE | NHP - ABS ENCLOSURE | |
| BODY | 2.5mm ABS IVORY WHITE | |
| RATINGS | AS/NZS 61439.2:2016 | POLLUTION DEGREE = 2 |
| | DEGREE OF PROTECTION - IP30 | INDOOR, STATIONARY ASSEMBLY |
| | FORM OF INTERNAL SEPARATION = FORM 1 | FOR USE BY ORDINARY PERSONS |
| | RATED CONTROL SUPPLY CURRENT $I_{nc}$ = 6A | EMC ENVIRONMENT = B |
| | RATED CONTROL SUPPLY VOLTAGE $U_e$ = 240V 1∅ + N + E | WALL-MOUNTED SURFACE TYPE ASSEMBLY |
| | RATED LIGHTING CIRCUIT CURRENT $I_{nc}$ = 25A (x4p) | FIXED PART CONSTRUCTION |
| | RATED LIGHTING CIRCUIT VOLTAGE $U_e$ = 415V 3∅ | BASIC PROTECTION BY ENCLOSURE(S) |
| | RATED INSULATION VOLTAGE $U_i$ = 500V | |
| | RATED IMPULSE VOLTAGE $U_{imp}$ = 4kV | |
| | RATED FREQUENCY $f_n$ = 50Hz | |
| | FAULT WITHSTAND $I_{cc}$ = 6kA | |
| | CONDITIONAL DEVICE = DTCBxxxx | |

METRIC 3RD ANGLE PROJECTION

PART No. CELAELK1W

TITLE OPEN TYPE ELTK - PUSH BUTTON

ELECTRICAL ENGINEERING PRODUCTS PTY LTD
INDUSTRIAL SWITCHGEAR AND AUTOMATION SOLUTION SPECIALISTS
A.C.N. 004 304 812
www.nhp.com.au
43 - 67 RIVER ST. RICHMOND VICTORIA 3121
TELEPHONE +61 3 9429 2999
FAX. +61 3 9429 1075
EMAIL mel-sales@nhp.com.au

DRAWING No. MD-R009399

REV: 0

SHEET No. 1 of 1

A3

SCALE: NTS