

DTC2504240D

NHP DIN-T Contactors 25A 4 Normally Closed Contacts 240V
AC DC Coil



Component type	Power contactor, AC switching
Range	DIN Contactors
Model	N/A
Product status	Existing

NHP's DIN contactors are compact DIN rail mounted contactors, perfect for mounting in panelboards or other enclosures for lighting control. They come in 5 ranges - 16A, 20A, 25A, 40A and 63A - and can have auxiliary contact added for indication.

ELECTRICAL

Number of normally open contacts as main contact	1
Number of normally closed contacts as main contact	4
Rated operation current I_e at AC-3, 400 V	9 A
Rated operation power at AC-3, 400 V	4 kW
Rated operation current I_e at AC-1, 400 V	25 A
Max. rated operation voltage U_e AC	500 V
Voltage type for actuating	AC/DC
Rated control supply voltage U_s at AC 50HZ	230-240 V
Control supply voltage U_s at DC	240 V
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as normally closed contact	0
Rated control supply voltage U_s at AC 60HZ	230-240 V
Power consumption, AC coil pickup	4 VA
Power consumption, AC coil hold-in	4 VA
Power consumption, DC coil pickup	4 W
Power consumption, DC coil hold-in	4 W
Type of electrical connection of main circuit	Screw connection

CONSTRUCTION

IP rating	IP20
Mounting method	DIN rail mounting

DIMENSIONS


Height	85 mm
Width	36 mm
Depth	58 mm
Weight	0.23 kg

DTC2504240D

NHP DIN-T Contactors 25A 4 Normally Closed Contacts 240V
AC DC Coil



DIMENSIONAL DIAGRAM

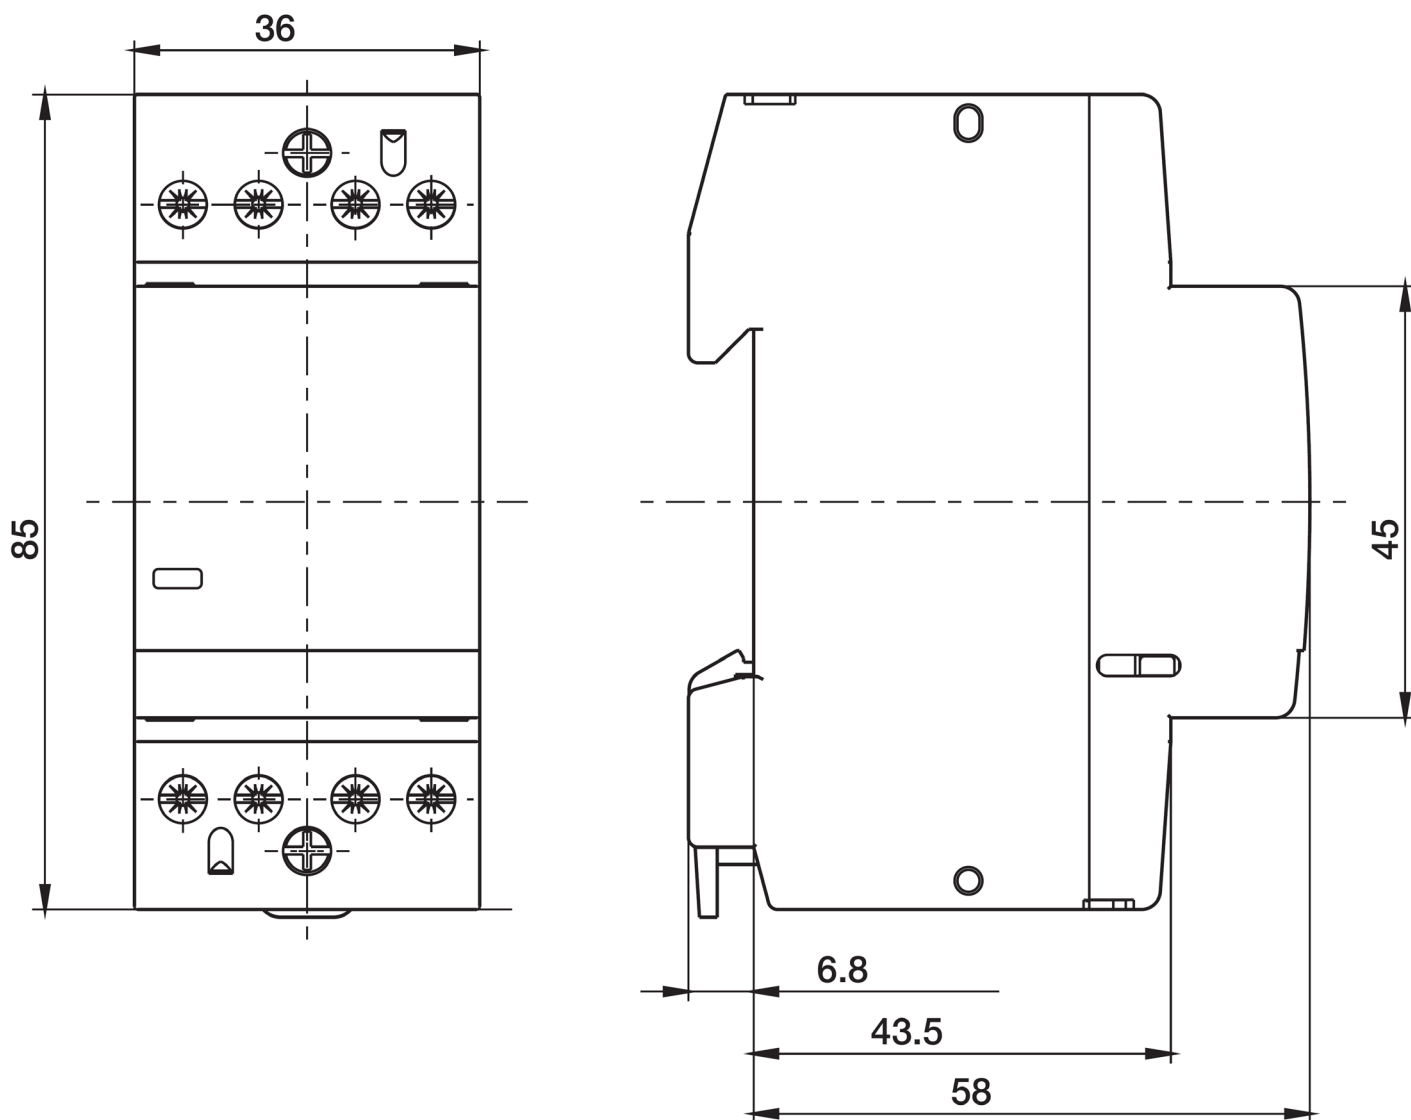

RELATED PRODUCTS

ACCESSORY



Item No: DTCAUX11

Required: No

Description: NHP DIN-T Contactors Auxiliary
9mm 1 Normally Open 1 Normally Closed
Contacts



Item No: DTCAUX20

Required: No

Description: NHP DIN-T Contactors Auxiliary
9mm 2 Normally Open Contacts



Item No: DTCSP9

Required: No

Description: NHP DIN Contactors Spacer
9mm suits DTC25 and DTC40 and DTC63