
EM2172RVV53XOXX

Carlo Gavazzi EM217 Energy Meter CT Connect 3 Phase 3 x 250A

3 PHASE METERS

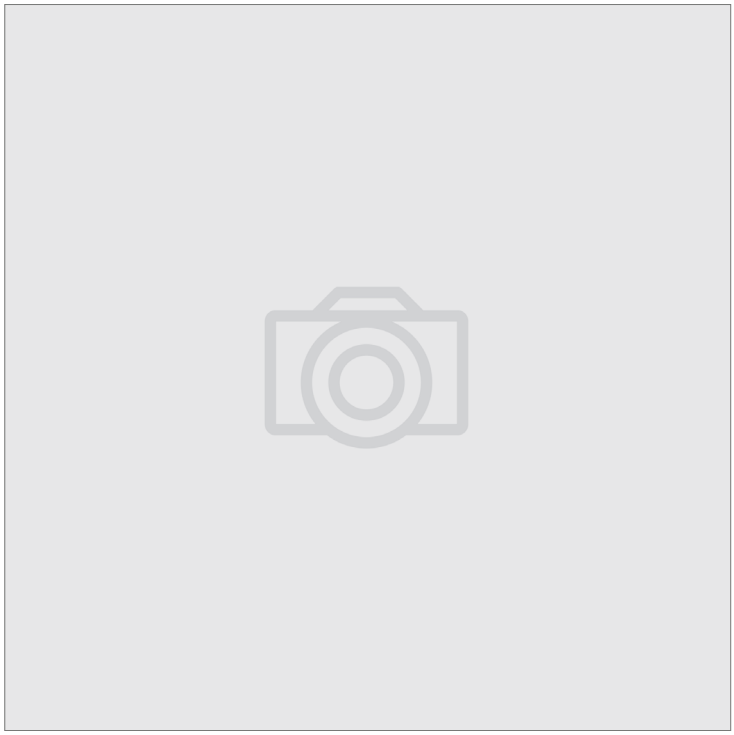

Component type	Multifunction energy meter
Range	EM270/EM271
Model	N/A
Alternative	EM2172RVV53XOSX

The Carlo Gavazzi Quick-fit CT Dual Monitoring Meters provide a comprehensive and accurate measurement of energy consumption for multi-load monitoring applications.

ELECTRICAL	Nominal current (In)	20 A
	Frequency	45-65 Hz
	Sampling frequency	1900 Hz
	Refresh time	1 s
	Type of display	LCD
	Measurement parameter kWh	Yes
	Measurement parameter kWh demand	Yes
	Measurement parameter kVARh	Yes
	Measurement parameter VAR	Yes
	Measurement parameter PF	Yes
	Measurement parameter Hz	Yes
	Measurement parameter TRMS (V,I)	Yes
CONSTRUCTION	Terminal type	Screw
	Material housing	Nylon
	Degree of protection (IP), front side	IP50
DIMENSIONS	Height	72 mm
	Width	72 mm
	Depth	65 mm
	Weight	0.4 kg
ENVIRONMENT	Operating temperature	-25…55 °C
	Storage temperature	-30…70 °C

Published on 21 July 2025