


# MVI69DFNT

ProSoft ControlLogix InRack EtherNet IP Client Server Interface

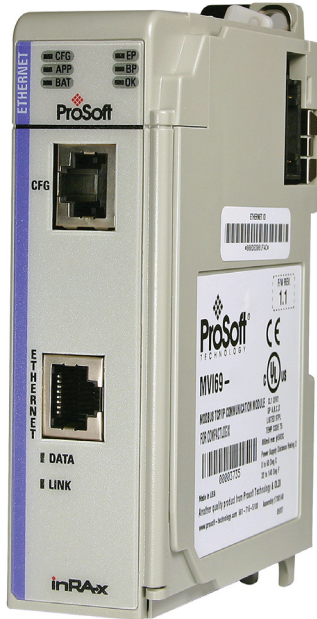

<b>Component type</b>	PLC communication module
<b>Range</b>	CompactLogix InRack Comms
<b>Model</b>	N/A
<b>Product status</b>	Existing

The ProSoft CompactLogix InRack Communication Module allows for easy and secure connection between devices within a single rack or chassis. It expands the capabilities of the CompactLogix system, improving operation performance and providing flexible connectivity options via various communication protocols, including Modbus TCP, Modbus Serial, ProfiBus and Linux development module.

## ELECTRICAL

With optical interface	No
Number of HW-interfaces industrial Ethernet	1.0
Number of interfaces PROFINET	0.0
Number of HW-interfaces RS-232	2.0
Number of HW-interfaces RS-422	0.0
Number of HW-interfaces RS-485	0.0
Number of HW-interfaces serial TTY	0.0
Number of HW-interfaces USB	0.0
Number of HW-interfaces parallel	0.0
Number of HW-interfaces Wireless	0.0
Number of HW-interfaces other	0.0
Network connection	10/100 Mbit
Supporting protocol for TCP/IP	No
Supporting protocol for PROFIBUS	No
Supporting protocol for CAN	No
Supporting protocol for INTERBUS	No
Supporting protocol for ASI	No
Supporting protocol for KNX	No
Supporting protocol for Modbus	No
Supporting protocol for Data-Highway	No
Supporting protocol for DeviceNet	No
Supporting protocol for SUCONET	No
Supporting protocol for LON	No
Supporting protocol for PROFINET IO	No
Supporting protocol for PROFINET CBA	No
Supporting protocol for SERCOS	No

## COMMUNICATION

# MVI69DFNT

ProSoft ControlLogix InRack EtherNet IP Client Server Interface



## COMMUNICATION

Supporting protocol for Foundation Fieldbus	No
Supporting protocol for EtherNet/IP	Yes
Supporting protocol for AS-Interface Safety at Work	No
Supporting protocol for DeviceNet Safety	No
Supporting protocol for INTERBUS-Safety	No
Supporting protocol for PROFIsafe	No
Supporting protocol for SafetyBUS p	No
Supporting protocol for other bus systems	No

## MECHANICAL

Shock acceleration (Max)	30.0 g
Vibration acceleration (Max)	5.0 m/s <sup>2</sup>
Vibration frequency, operational (Max)	150.0 Hz

## ENVIRONMENT

Ambient temperature during operating	0 - 60 °C
Storage temperature	-40 - 85 °C
Max. ambient humidity (non-condensing)	95.0 %