SLB1253PD

Socomec SLB Load Break Switch kit, w/ Direct Handle, 3P 125A

LOAD BREAK SWITCHES



Component type	Switch disconnector
Range	SLB
Model	N/A
Product status	Existing

Compact switching solutions from 125A up to 5000A, the SLB range of load break switches are a proven, reliable design. Severe load duty categories (AC-22 and AC-23) are well suited to the arduous switching of motors, main switch isolation and disconnection of other loads.

ELECTRICAL

Max. rated operation voltage Ue AC	8000 V
Rated permanent current at AC-21, 400 V	125 A
Rated uninterrupted current Iu	125 A
Number of poles	3
Rated operation power at AC-23, 400 V	63 kW
Rated operation current Ie at AC-23a, 400 V	125 A
Rated operation current Ie at AC-23a, 500 V	100 A
Rated operation current Ie at AC-23a, 690 V	63 A
Rated operation current Ie at DC-23, 220 V	125 A
Rated operation current Ie at DC-23a, 500 V	125 A
Rated short-time withstand current Icw	5 kA
Rated insulation voltage Ui	800 V
Rated impulse withstand voltage Uimp	8 kV
Type of control element	Door coupling rotary drive
Rated permanent current at AC-23, 400 V	125 A
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as change-over contact	0

CONSTRUCTION

Degree of protection (IP), front side	IP65
Version as main switch	Yes
Version as reversing switch	No
Number of switches	1
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No

Published on 24 July 2026

SLB1253PD

Socomec SLB Load Break Switch kit, w/ Direct Handle, 3P 125A


LOAD BREAK SWITCHES


CONSTRUCTION	Suitable for distribution board installation	Yes
	Suitable for intermediate mounting	No
	Interlockable	No
MECHANICAL	Padlock locking	Yes
DIMENSIONS	Height	135 mm
	Width	120 mm
	Depth	65 mm
	Weight	1 kg
	Conductor cross section solid (solid, stranded)	35-50 mm²
	Connectable conductor cross section	35-50 mm²

DIMENSIONAL DIAGRAM

SIRCO 125 to 630 A and SIRCO AC 200 to CD 630 A


Direct front operation

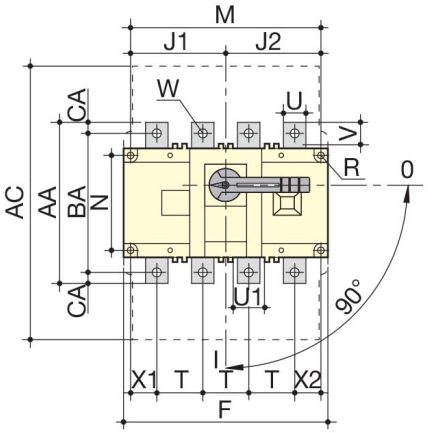

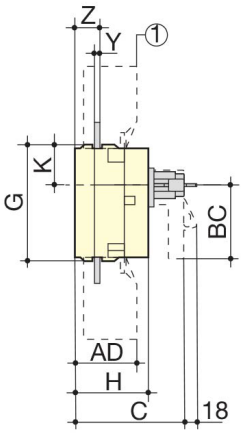

1. Terminal shroud

External front operation



1. S2 type handle

		Overall Dim.		Terminal shrouds																										
Rating(A) SIRCO	Rating(A) SIRCO AC	C	D min	AC	AD	F 3p.	F 4p.	G	H	J1 3p.	J2 4p.	J2	K	BC	M 3p.	M 4p.	N	R	T	U	U1	V	W	X1 3p.	X1 4p.	X2	Y	Z	AA	BA	CA
125...160		115	125	235	50	140	170	93	65	45	75	75	31.5	80	120	150	65	5.5	36	20	20.5	25	9	28	22	20	3.5	20.5	135	115	10
200...250	200...250			280	60	180	230	108	75	55	105	105	34	115	160	210	80	5.5	50	20	25.5	21.5	11	33	33	27	3.5	22.5	160	130	15
	315																			35										
315...400	400...500	160	165	401	89	230	290	170	110	75	135	135	55	115	210	270	140	7	65	32	45.5	29	11	42.5	37.5	37.5	5	36	235	205	15
500	-																						13								
630	CD 630																			45		41.5							260	220	20

Published on 24 July 2026