
SLB25D3P

Socomec SLBM Load Break Switch kit, w/ Direct handle, 3P 25A

LOAD BREAK SWITCHES

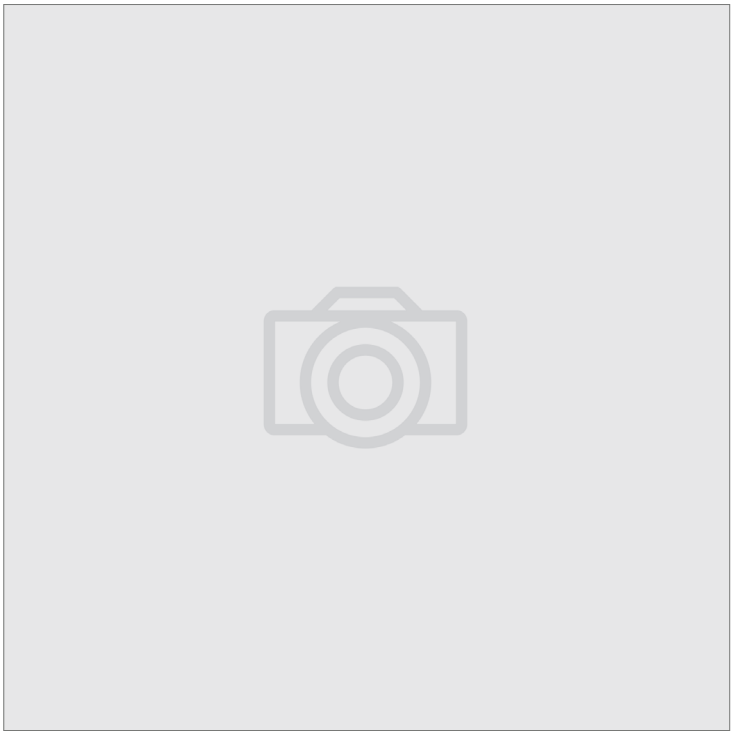

Component type	Switch disconnector
Range	SLB
Model	N/A
Alternative	SLBM253PD

Compact switching solutions from 125A up to 5000A, the SLB range of load break switches are a proven, reliable design. Severe load duty categories (AC-22 and AC-23) are well suited to the arduous switching of motors, main switch isolation and disconnection of other loads.

ELECTRICAL	Max. rated operation voltage Ue AC	8000 V
	Rated uninterrupted current Iu	25 A
	Number of poles	3
	Type of control element	Door coupling rotary drive
	Number of auxiliary contacts as normally closed contact	0
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as change-over contact	0
CONSTRUCTION	Degree of protection (IP), front side	IP65
	Version as main switch	Yes
	Number of switches	1
	Suitable for front mounting 4-hole	No
	Suitable for front mounting centre	No
	Suitable for distribution board installation	Yes
	Suitable for intermediate mounting	No
	Interlockable	No
MECHANICAL	Padlock locking	Yes

Published on 24 July 2026