
SSFBS12503P

Socomec SSF Fuse Switch kit, w/ External Handle, suits BS fuses, 3P 1250A

BS FUSE HOLDERS AND SWITCHES

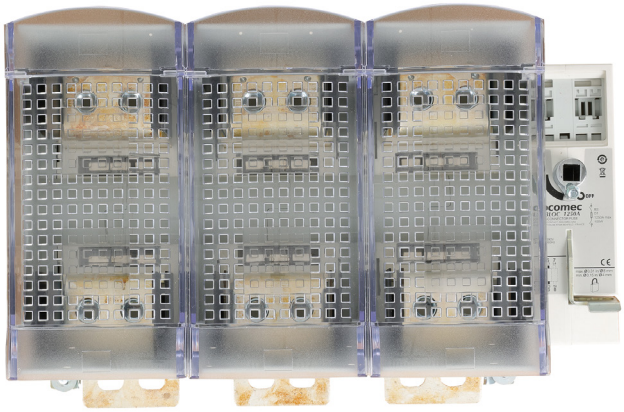

Component type	Fuse switch disconnector
Range	DIN Fuses
Model	N/A
Product status	Existing

NHP's DIN Fuses are designed to meet the physical size standards set by the industry, ensuring compatibility with a wide range of equipment and systems. NHP fuses conform to the DIN standard, which is recognised and accepted as the industry standard for fuse sizing and performance.

ELECTRICAL	Rated current	1250 A
	Max. rated operation voltage Ue AC	690 V
	Max. rated operation voltage Ue DC	440 V
	Rated permanent current at AC-21, 400 V	1250 A
	Rated permanent current at AC-23, 400 V	1000 A
	Rated operation current Ie at DC-21, 220 V	1250 A
	Rated operation current Ie at DC-21, 440 V	1000 A
	Rated operation current Ie at DC-22, 220 V	1250 A
	Rated operation current Ie at DC-22, 440 V	1000 A
	Rated operation current Ie at DC-23, 440 V	1000 A
	Rated impulse withstand voltage Uimp	12 kV
	Rated insulation voltage Ui	1000 V
	Rated operation power at AC-23, 400 V	560 kW
CONSTRUCTION	Degree of protection (IP), front side	IP30
MECHANICAL	Suitable for fuses	D01
	Mechanical life (service cycles)	5000 cycles
DIMENSIONS	Height	475 mm
	Width	442 mm
	Depth	289 mm

Published on 21 July 2026