
SSFDN1253P

Socomec SSF Fuse Switch kit, w/ External Handle, suits DIN fuses, 3P 125A

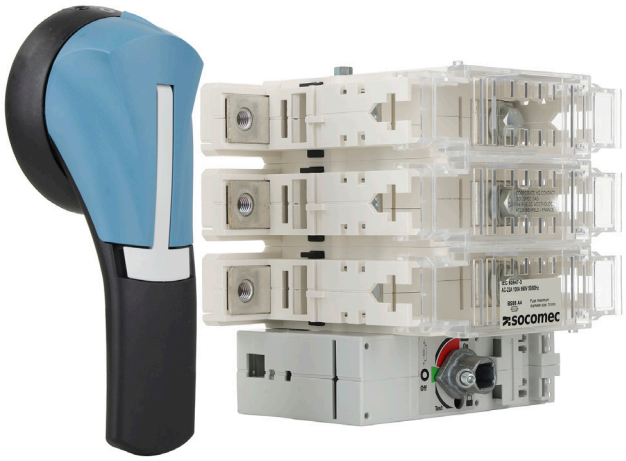

Component type	Fuse switch disconnector
Range	Fuse Switch
Model	N/A
Product status	Existing

The Socomec SSF standard fuse switches boast IP 30 protection on all fuse terminals in a compact yet effective design. These fuse switches feature a test position and double-break contacts per phase, allowing the safe isolation of AC or DC circuits as well as the added short circuit protection offered by DIN/BS type HRC fuses.


ELECTRICAL	Rated current	125 A
	Max. rated operation voltage Ue AC	690 V
	Max. rated operation voltage Ue DC	440 V
	Rated permanent current at AC-21, 400 V	125 A
	Rated permanent current at AC-23, 400 V	125 A
	Rated operation current Ie at DC-21, 220 V	125 A
	Rated operation current Ie at DC-22, 220 V	125 A
	Rated impulse withstand voltage Uimp	8 kV
	Rated insulation voltage Ui	750 V
	Rated operation power at AC-23, 400 V	63 kW
CONSTRUCTION	Degree of protection (IP), front side	IP30
MECHANICAL	Suitable for fuses	NH00
	Mechanical life (service cycles)	10000 cycles
DIMENSIONS	Height	162 mm
	Width	148 mm
	Depth	126 mm

Published on 21 July 2026

SSFDN1253P

Socomec SSF Fuse Switch kit, w/ External Handle, suits DIN fuses, 3P 125A

DIMENSIONAL DIAGRAM

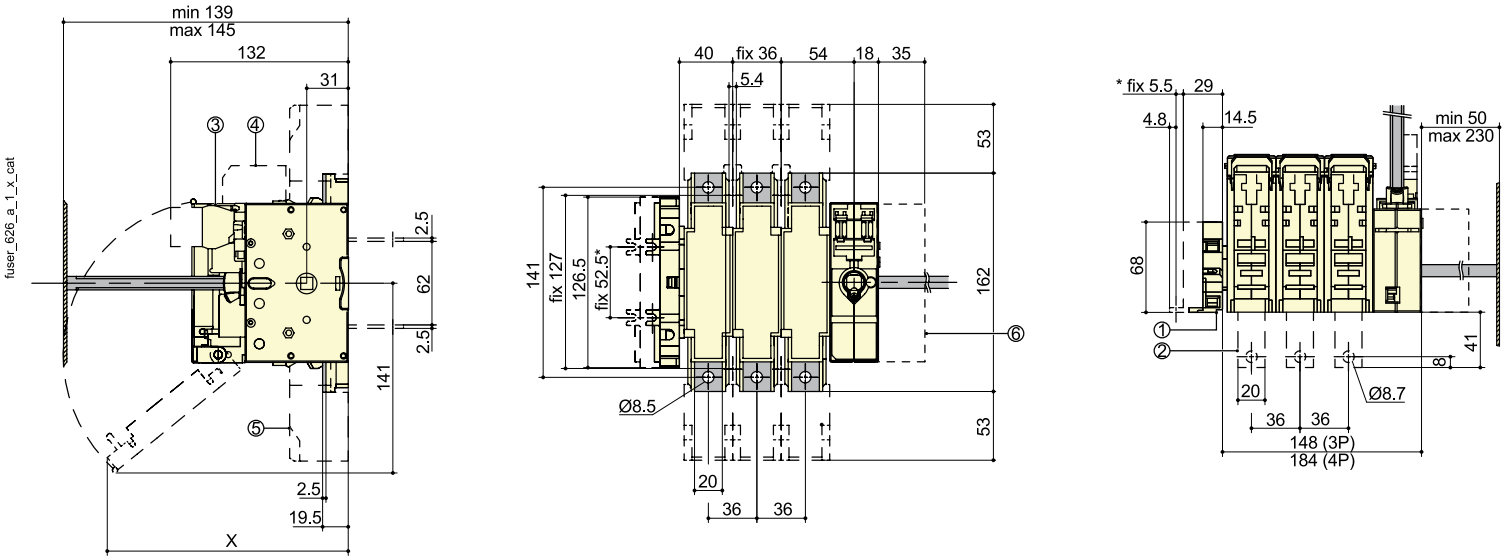

* to use if pre-break auxiliary contact number > 4
X: 179 for BS88 / NFC and DIN 100 to 125 A
189 for NFC and DIN 125 to 160 A

① S-type auxiliary contact NO + NC to use if block number > 4
② Rear connection (option)
③ 1 to 4 pre-break auxiliary contact for signalisation
④ 1 or 2 pre-break auxiliary contact (fuse blown indication)
⑤ Terminal shrouds
⑥ Additional contact holder for U-type AC

Published on 21 July 2026