


TT35A110VAC

IME TT35 Combined CT and Transducer 4 Wire 25 to 225A In 4 to 20mA Out 110V AC Auxiliary

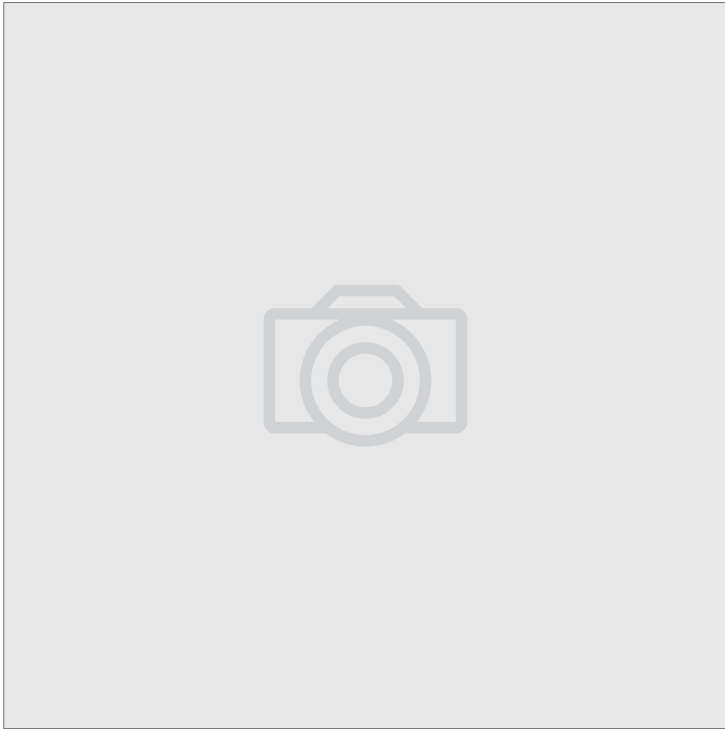

Component type	Current transformer
Range	Solid Core CT
Model	N/A
Product status	Existing

The IME solid core current transformers are highly accurate and cover a broad range of sizes and form factors that suit busbar, cable, or protection class applications.

ELECTRICAL

Primary rated current	225.0 A
Secondary rated current	0.02 A
Rated operating frequency	43 - 63 Hz
Accuracy class	1
Power loss	2.5 W
Calibrated	Yes

CONSTRUCTION

Material housing	Plastic
Model	Single-phase current converter
With shock protection	Yes
Number of primary inputs	1.0

DIMENSIONS

Opening diameter	35.0 mm
------------------	---------

ENVIRONMENT

Storage temperature	-25 - 70 °C
---------------------	-------------

TT35A110VAC

IME TT35 Combined CT and Transducer 4 Wire 25 to 225A In 4 to 20mA Out 110V AC Auxiliary



DIMENSIONAL DIAGRAM

