
5201104S103M

ProSoft PLINX IEC 60870-5-104 Server to IEC 60870-5-103 Master

GATEWAYS AND TRANSLATORS

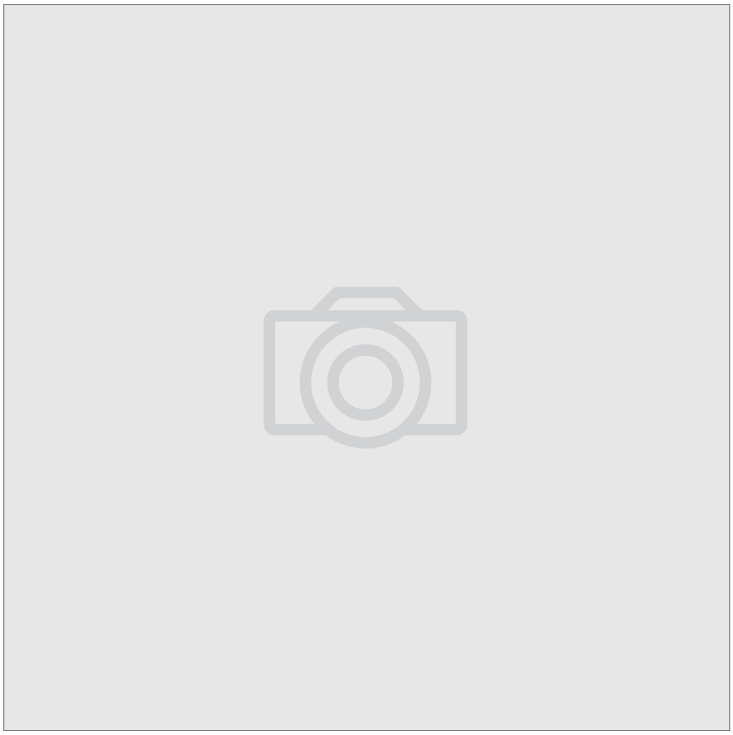

Component type	Fieldbus, decentr. periphery - communication module
Range	Stand-alone
Model	N/A
Alternative	NO ALTERNATIVE ITEM

ProSoft Technology stand-alone DIN rail-mounted industrial gateways provide an easy-to-use solution to read or write data from devices using different protocols. All ProSoft gateways are equipped with ProSoft Discovery Service (PDS) software which automatically detects the default IP address without being on the same subnet, saving setup time and enabling faster network configuration.

ELECTRICAL	**Supply voltage DC**	18-36 V
	Voltage type of supply voltage	DC
DIMENSIONS	**Width**	52.5 mm
	Height	132 mm
	Depth	114.8 mm

Published on 02 November 2026