

569201

nVent ERIFLEX Distribution Blocks 715A In 1 x 95 to 240mm Out
6 x 10 to 50mm Aluminium



TERMINALS AND DISTRIBUTION BLOCKS



Component type	Distributor assembly terminal blocks
Range	Distribution Block
Model	N/A
Product status	Existing

The nVent ERIFLEX range of distribution blocks are the ideal termination point between output and input devices. They come in a wide range of current ratings from 80A to 1740A and offer connection ratio with 1 or 2 inputs up to 12 outputs terminals. Terminals are tin plated to cater for copper or aluminium conductors offering IP2X touch protection.

ELECTRICAL

Number of poles	1
Rated insulation voltage Ui	1000 V
Short time withstand current Icw, 1 sec	34.3 kA
Max. rated current	500 A

CONSTRUCTION

Conductor material	Aluminium/copper
With PE-rail	No
With N-rail	No

DIMENSIONS

Conductor cross section (solid, stranded)	50-10 mm ²
Height	90 mm
Width	44 mm
Depth	148 mm

569201


nVent ERIFLEX Distribution Blocks 715A In 1 x 95 to 240mm Out
6 x 10 to 50mm Aluminium



TERMINALS AND DISTRIBUTION BLOCKS



DIMENSIONAL DIAGRAM

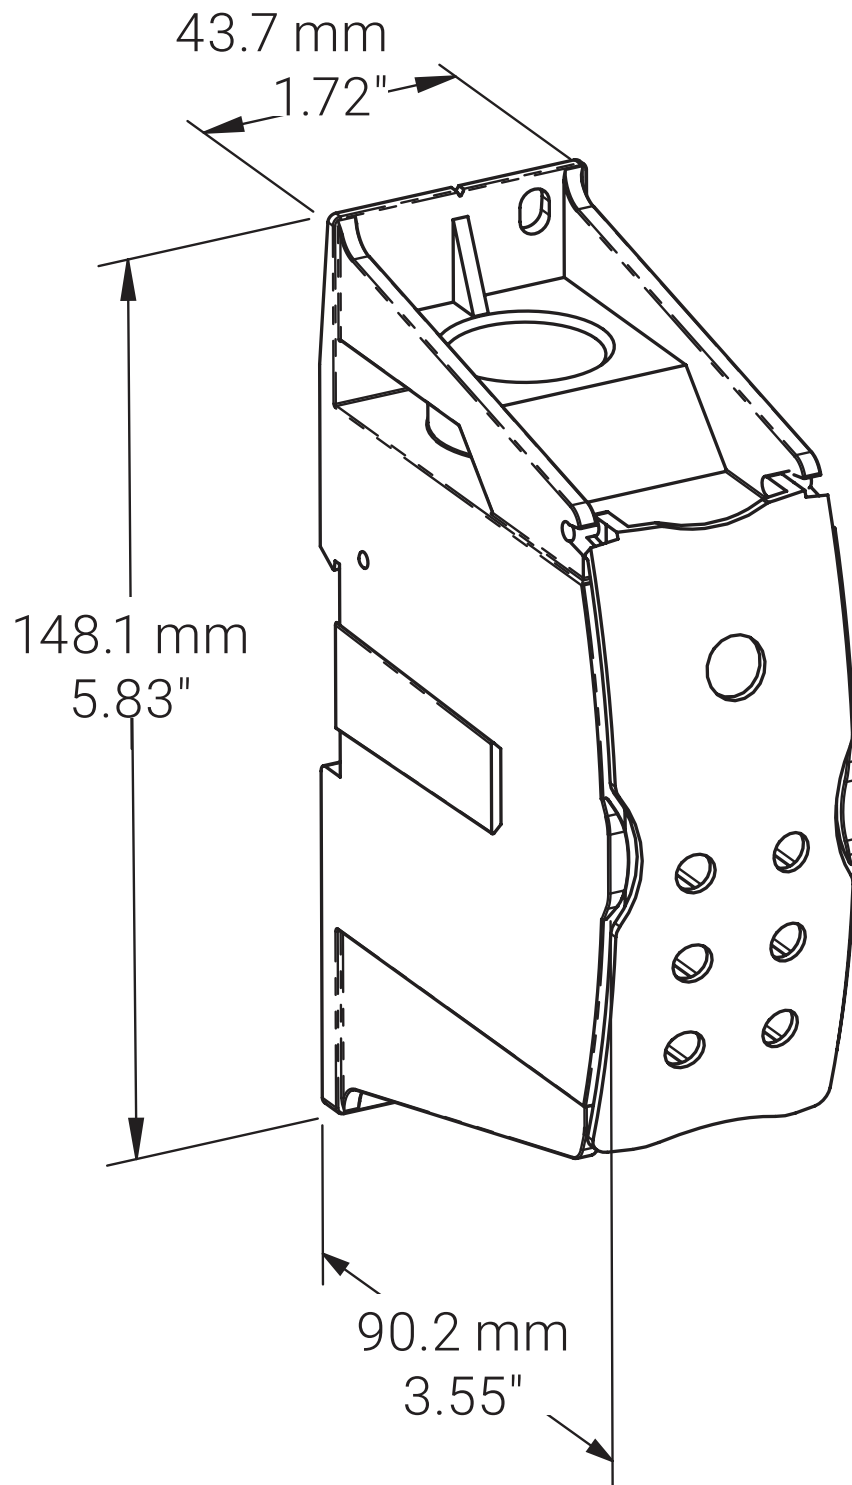

569201

nVent ERIFLEX Distribution Blocks 715A In 1 x 95 to 240mm Out
6 x 10 to 50mm Aluminium



TERMINALS AND DISTRIBUTION BLOCKS



RELATED PRODUCTS

ACCESSORY



Item No: 561138

Required: No

Description: nVent ERIFLEX High Current
Terminal End Clamp for DIN35 Mount or Panel
Mount