

1715A2A

Allen-Bradley 1715 Redundant I/O Ethernet Adapter Base 2 Slots




IN CABINET DISTRIBUTED IO



Allen-Bradley

Component type	Fieldbus, decentr. periphery - analogue/digital I/O module
Range	Redundant IO
Model	N/A
Product status	Existing

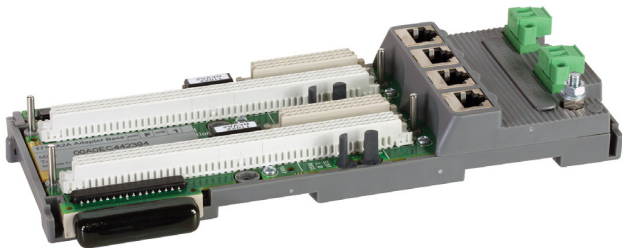

ELECTRICAL	Type of voltage (input voltage)	DC
	Supply voltage DC	24-24 V
COMMUNICATION	Supporting protocol for EtherNet/IP	Yes
CONSTRUCTION	Suitable for safety functions	No
DIMENSIONS	Width	84 mm
	Height	234 mm
	Depth	30 mm
ENVIRONMENT	Operating temperature	-25...60 °C
	Storage temperature	-40...85 °C
	Max. ambient humidity (non-condensing)	95 %

1715A2A

Allen-Bradley 1715 Redundant I/O Ethernet Adapter Base 2 Slots



IN CABINET DISTRIBUTED I/O



Allen-Bradley

DIMENSIONAL DIAGRAM

