
26990141

Socomec SLB Auxiliary Contact, 1 N.O + 1 N.C, suits 1st Position 125 - 3200A

LOAD BREAK SWITCHES

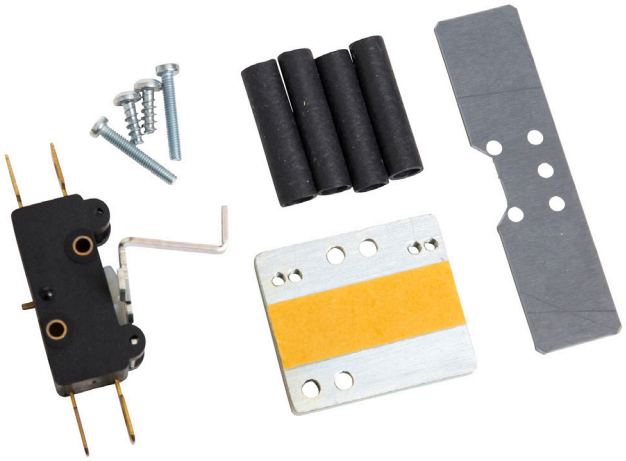

Component type	Auxiliary contact block
Range	SLB
Model	N/A
Product status	Existing

Compact switching solutions from 125A up to 5000A, the SLB range of load break switches are a proven, reliable design. Severe load duty categories (AC-22 and AC-23) are well suited to the arduous switching of motors, main switch isolation and disconnection of other loads.

ELECTRICAL	**Number of contacts as normally open contact**	1
	Number of contacts as normally closed contact	1
	Rated operation current Ie at AC-15, 400 V	3 A
	Rated operation current Ie at DC-12, 24 V	16 A
	Rated operation current Ie at DC-13, 24 V	5 A
	Type of electric connection	Flat plug-in connection
	Rated operation current Ie at AC-15, 230 V	4 A
CONSTRUCTION	**Mounting method**	Front fastening
	Model	Top mounting and integrable
	Lamp holder	None

Published on 15 July 2026