5069OB16

Allen-Bradley Compact 5000 I/O 16 Channel Digital Output 24V DC Module

MID-RANGE CONTROL SYSTEMS



Component type	PLC digital I/O-module
Range	Compact 5000 Safety I/O
Model	N/A
Product status	Existing

Allen-Bradley Compact 5000 I/O Safety Modules provide a flexible, reliable, easy-to-use solution for integrating safety into industrial automation and control systems. Providing distributed I/O to the Compact GuardLogix 5380 and GuardLogix 5580, accessible via a 5069-AEN2TR or 5069-AENTR over an EtherNet/IP and supporting up to 31 I/O modules per controller or adapter.

ELECTRICAL	**Type of digital output**	Transistor
	Permitted voltage at output	10-32 V
	Type of output voltage	DC
	Voltage type of supply voltage	DC
	Digital inputs configurable	No
	Digital outputs configurable	No
	Output current	8 A
	Short-circuit protection, outputs available	No
	Redundancy	No
	Type of electric connection	Screw-/spring clamp connection
	Output current at digital output	0.5 A
CONSTRUCTION	**Number of digital outputs**	16
	Suitable for safety functions	No
DIMENSIONS	**Width**	22 mm
	Height	144.57 mm
	Depth	105.42 mm
ENVIRONMENT	**Operating temperature**	0…60 °C
	Storage temperature	-40…85 °C
	Max. ambient humidity (non-condensing)	95 %


Published on 10 September 2026

5069OB16

Allen-Bradley Compact 5000 I/O 16 Channel Digital Output 24V DC Module

MID-RANGE CONTROL SYSTEMS

DIMENSIONAL DIAGRAM

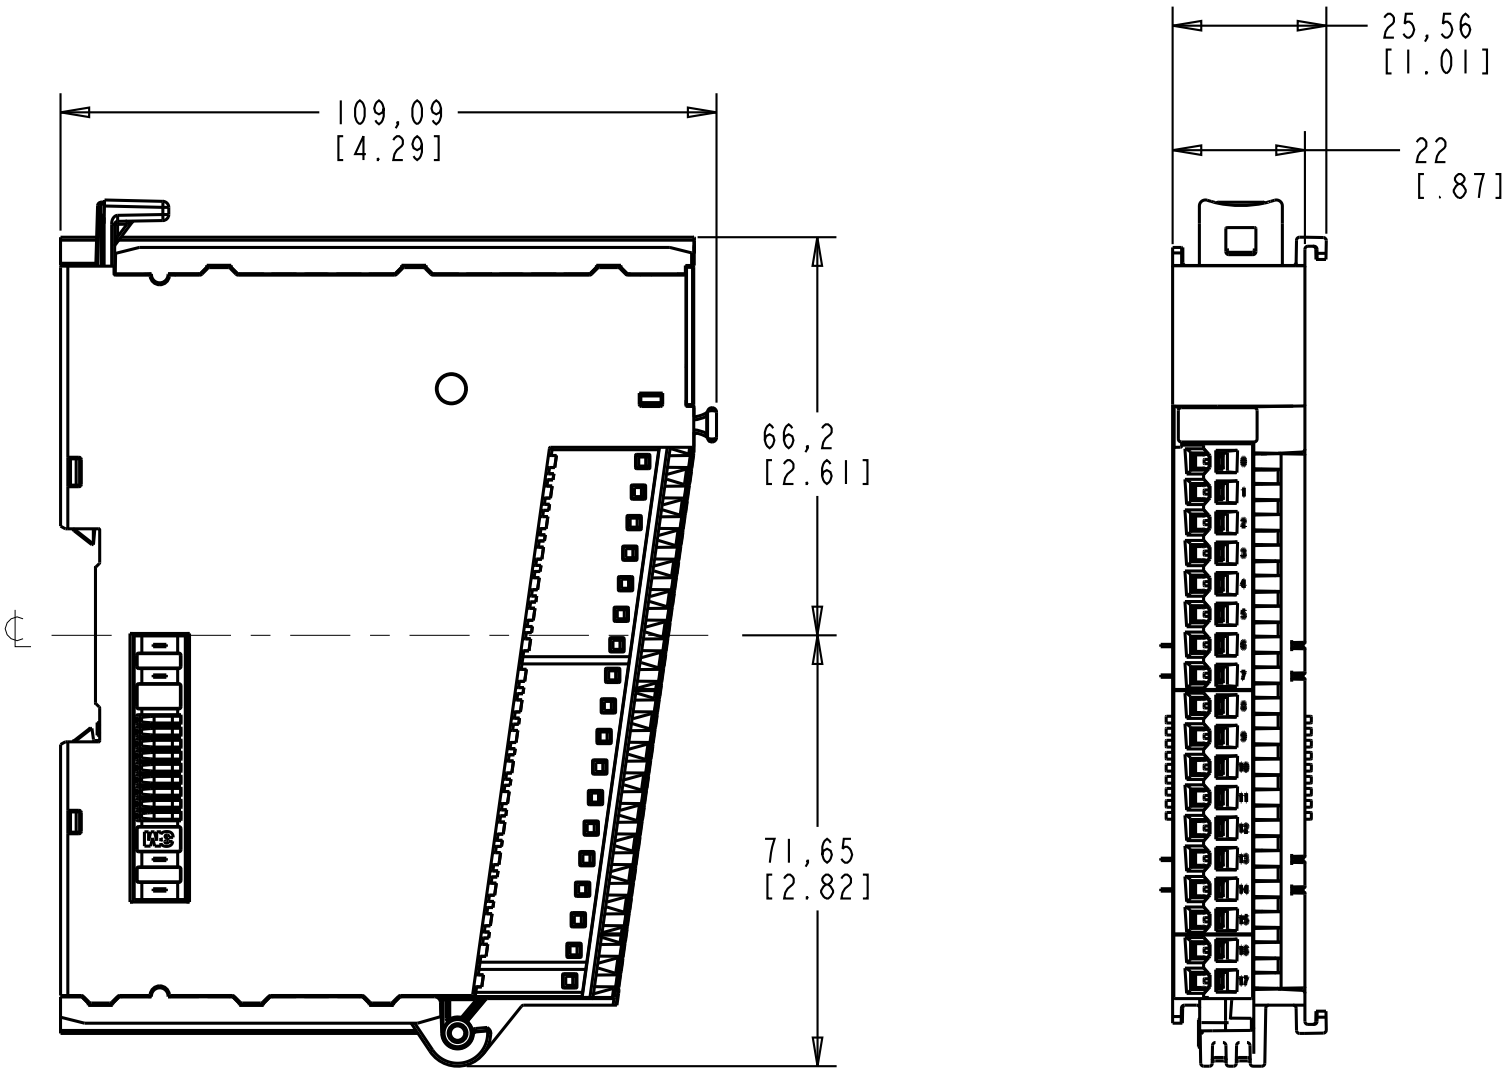

Published on 10 September 2026