569205

nVent ERIFLEX Distribution Blocks Active Link 1010A Input 2 x 95 to 185mm Output 12 x 4 to 25mm

TERMINALS AND DISTRIBUTION BLOCKS

Component type	Distributor assembly terminal blocks
Range	Distribution Block
Model	N/A
Product status	Existing

The nVent ERIFLEX range of distribution blocks are the ideal termination point between output and input devices. They come in a wide range of current ratings from 80A to 1740A and offer connection ratio with 1 or 2 inputs up to 12 outputs terminals. Terminals are tin plated to cater for copper or aluminium conductors offering IP2X touch protection.

ELECTRICAL	**Number of poles**	1
	Rated insulation voltage Ui	1000 V
	Short time withstand current Icw, 1 sec	42.9 kA
	Max. rated current	630 A
CONSTRUCTION	**Conductor material**	Aluminium/copper
	With PE-rail	No
	With N-rail	No
DIMENSIONS	**Conductor cross section (solid, stranded)**	4-25 mm²
	Height	78 mm
	Width	44 mm
	Depth	127 mm

Published on 02 October 2026

DIMENSIONAL DIAGRAM

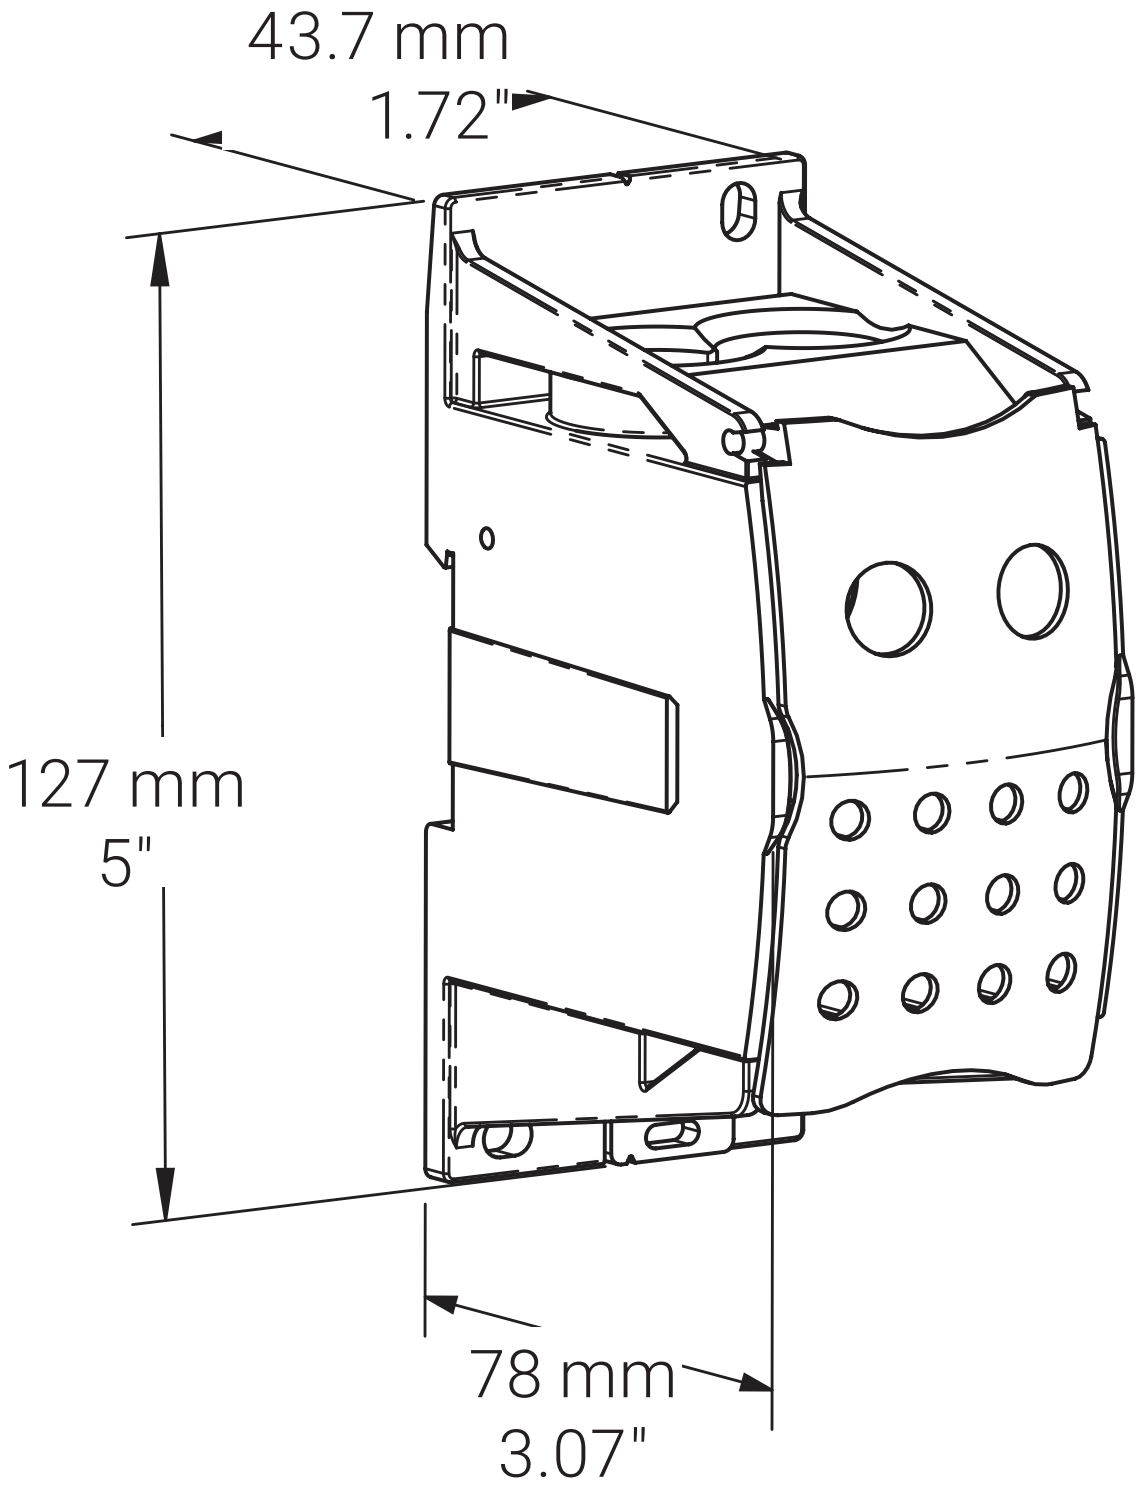

RELATED PRODUCTS

ACCESSORY

Item No: 561138

Required: No

Description: nVent ERIFLEX High Current Terminal End Clamp for DIN35 Mount or Panel Mount