800TXA7

Allen-Bradley 800T Contact Block Shallow 1 N.C. Late Brake Contact 1 N.C. for 30.5mm PB

PUSHBUTTON AND PILOT LIGHTS

Allen-Bradley

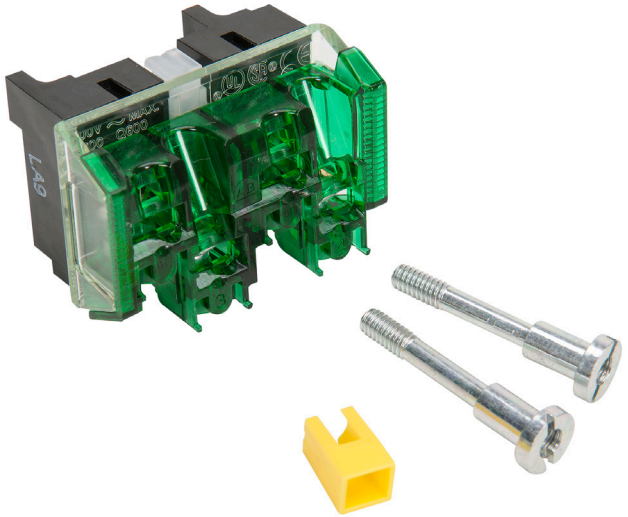

Component type	Auxiliary contact block
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

ELECTRICAL

Number of contacts as normally closed contact	1
Number of auxiliary contacts as normally closed contact, delayed switching	1
Rated insulation voltage Ui	300 V
Rated operation current Ie at AC-15, 120 V	6 A
Rated operation current Ie at AC-15, 240 V	3 A
Rated operation current Ie at AC-15, 400 V	1.8 A
Rated operation current Ie at DC-13, 110 V	0.63 A
Rated operation current Ie at DC-13, 125 V	0.55 A
Rated operation current Ie at DC-13, 250 V	0.27 A
Min. contact rating current	24 mA
Min. contact rating voltage	24 V