EC3025TBASL6

Carlo Gavazzi Capacitive Proximity Stainless Steel M30 SCR NO NC Contacts 25mm plus 5m M12 Cable

NON-CONTACT SENSORS



Component type	Capacitive proximity switch
Range	Capacitive Prox
Model	N/A
Alternative	CALL FOR ALTERNATIVE

The Carlo Gavazzi Capacitive Sensors are designed as an industrial sensor used to detect the presence or absence of a target object. Easily installed and maintained, with a clear, simple design making it easy to diagnose and repair issues. Available in 12 mm, 18 mm, and 30 mm diameters with both AC and DC outputs as well as plastic and metal housings with either a built-in cable or a connector.

ELECTRICAL	**Setting procedure**	Manual adjustment
	Switching distance	25 mm
	Voltage type	AC
	Rated control supply voltage Us at AC 50HZ	20-250 V
	Type of switch function	Programmable/configurable
	Type of switching output	2-wire
	Switching frequency	10 Hz
	Number of conductors	2
	Type of electric connection	Cable
CONSTRUCTION	**Construction type housing**	Cylinder, screw-thread
	Material housing	Metal
DIMENSIONS	**Length of sensor**	75.6 mm
	Diameter sensor	30 mm
ENVIRONMENT	**Rated temperature**	-25…80 °C


Published on 14 July 2026

EC3025TBASL6

Carlo Gavazzi Capacitive Proximity Stainless Steel M30 SCR NO NC Contacts 25mm plus 5m M12 Cable

NON-CONTACT SENSORS

DIMENSIONAL DIAGRAM

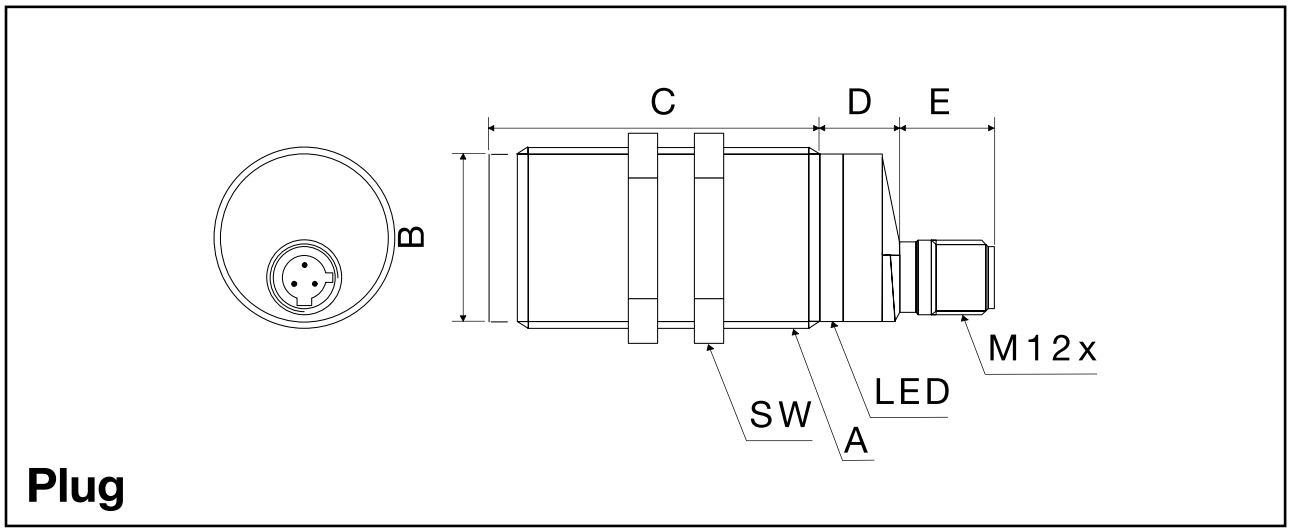

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
EC 3016TBASL(-6)	M30 x 1.5 x 50	28	50	13.6	15.4	5	36

Published on 14 July 2026