RCSI562O5M

Steute Non-contact Interlock Safety Magnetic Switch Plastic Rectangle 2NC 5m Cable

NON-CONTACT INTERLOCKS

.steute



Component type	Limit switch
Range	Non-contact Interlock
Model	N/A
Product status	Existing

Steute safety sensors safeguard sliding, hinged and removable protective doors that are required to be closed to secure operators safety. They can be retro-fitted onto existing equipment and safety sensors are used as an alternative to mechanically operated limit switches. Safe switching is ensured through the encapsulation of contacts, even in the presence of aggressive materials.

ELECTRICAL	Number of contacts as normally closed contact	2
	Number of contacts as normally open contact	0
	Number of contacts as change-over contact	0
	Type of control element	Other
	Type of electric connection	With cable preassembled
	Rated operation current Ie at AC-15, 230 V	0 A
	Rated operation current Ie at DC-13, 230 V	0 A
	Forced opening	No
COMMUNICATION	Type of interface	None
	Type of interface for safety communication	None
CONSTRUCTION	Material housing	Plastic
	IP rating	IP67
	Construction type housing	Other
	Alignment of the control element	Other
	Suitable for safety functions	Yes
MECHANICAL	Switching function latching	No
	With status indication	No
DIMENSIONS	Cable length	5 m
	Height of sensor	16 mm
	Length of sensor	50 mm
	Width sensor	40 mm
ENVIRONMENT	Rated temperature	-20…85 °C
CERTIFICATES/APPROVALS	Explosion safety category for gas	Other
	Explosion safety category for dust	Other

Published on 02 November 2026


RCSI562O5M

Steute Non-contact Interlock Safety Magnetic Switch Plastic Rectangle 2NC 5m Cable

NON-CONTACT INTERLOCKS

.steute

DIMENSIONAL DIAGRAM

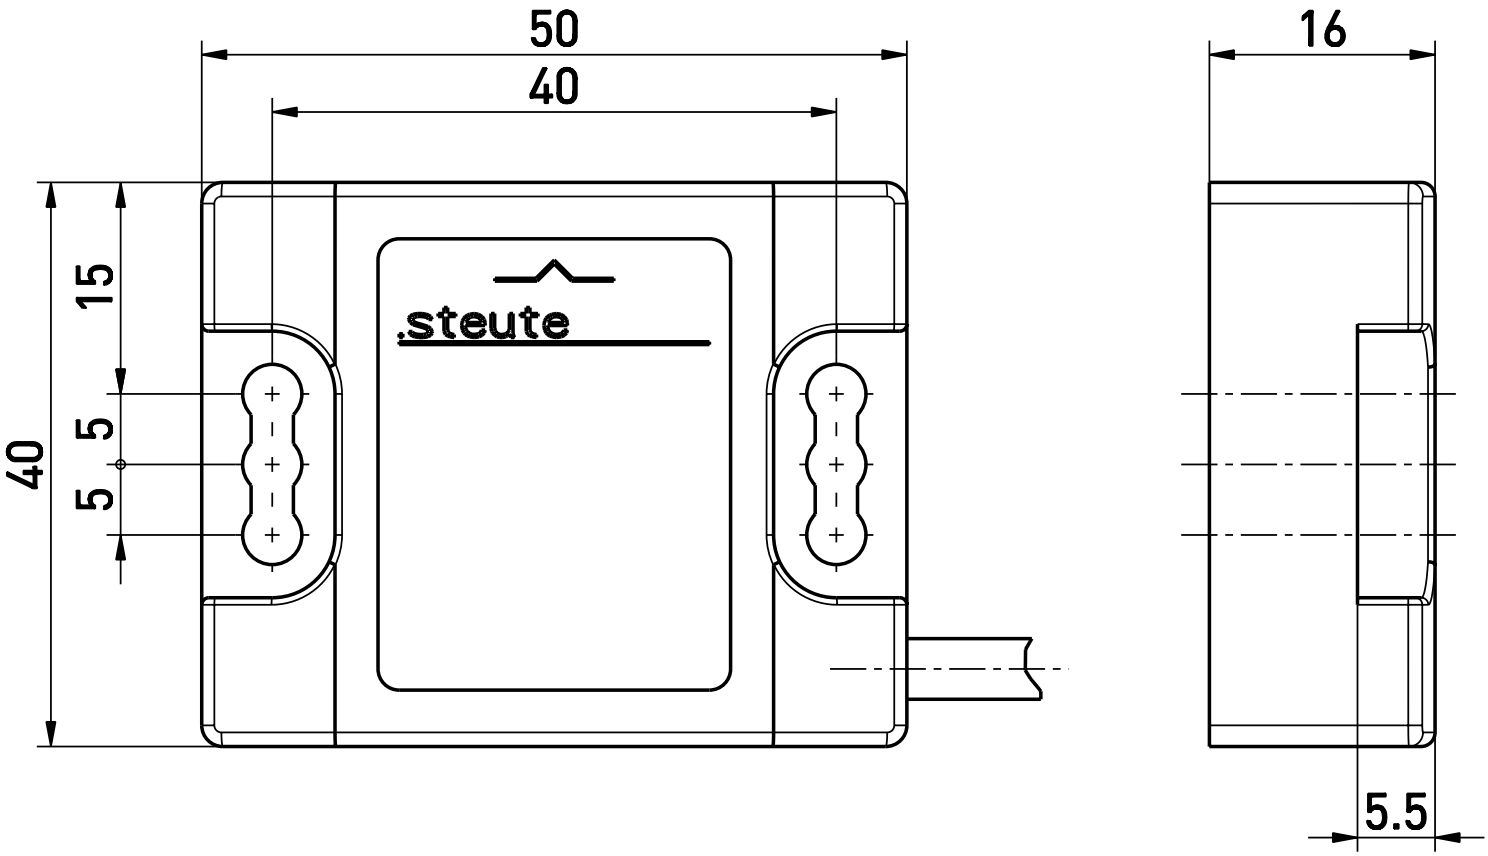

Published on 02 November 2026