RF95WULRSW915

Steute Wireless Limit Switch Plastic Plunger with Collar Long Range 700m

WIRELESS DEVICES

.steute



Component type	Limit switch
Range	Wireless Limit Switch
Model	N/A
Alternative	CALL FOR ALTERNATIVE

Steute wireless position switches are applied where moving parts of machinery and plant systems must be positioned or switched off. Applications include security tasks in different sectors of industrial building automation, drinking water storage, and regenerative energy supply. Available with metal and thermoplastic enclosures and an electrodynamic energy generator or a lithium-ion battery.

ELECTRICAL	Type of control element	Plunger
	Type of electric connection	Other
	Rated operation current Ie at AC-15, 230 V	0 A
	Rated operation current Ie at DC-13, 230 V	0 A
	Output electronic	Yes
	Forced opening	No
COMMUNICATION	Type of interface	None
	Type of interface for safety communication	None
CONSTRUCTION	Material housing	Plastic
	IP rating	IP67
	Construction type housing	Other
	Alignment of the control element	Other
	Suitable for safety functions	No
MECHANICAL	Switching function latching	No
	With status indication	No
DIMENSIONS	Height of sensor	30 mm
	Length of sensor	126.5 mm
	Width sensor	30 mm
	Diameter sensor	6 mm
ENVIRONMENT	Rated temperature	-20…65 °C
CERTIFICATES/APPROVALS	Explosion safety category for gas	Other
	Explosion safety category for dust	Other

Published on 02 November 2026


RF95WULRSW915

Steute Wireless Limit Switch Plastic Plunger with Collar Long Range 700m

WIRELESS DEVICES

.steute

DIMENSIONAL DIAGRAM

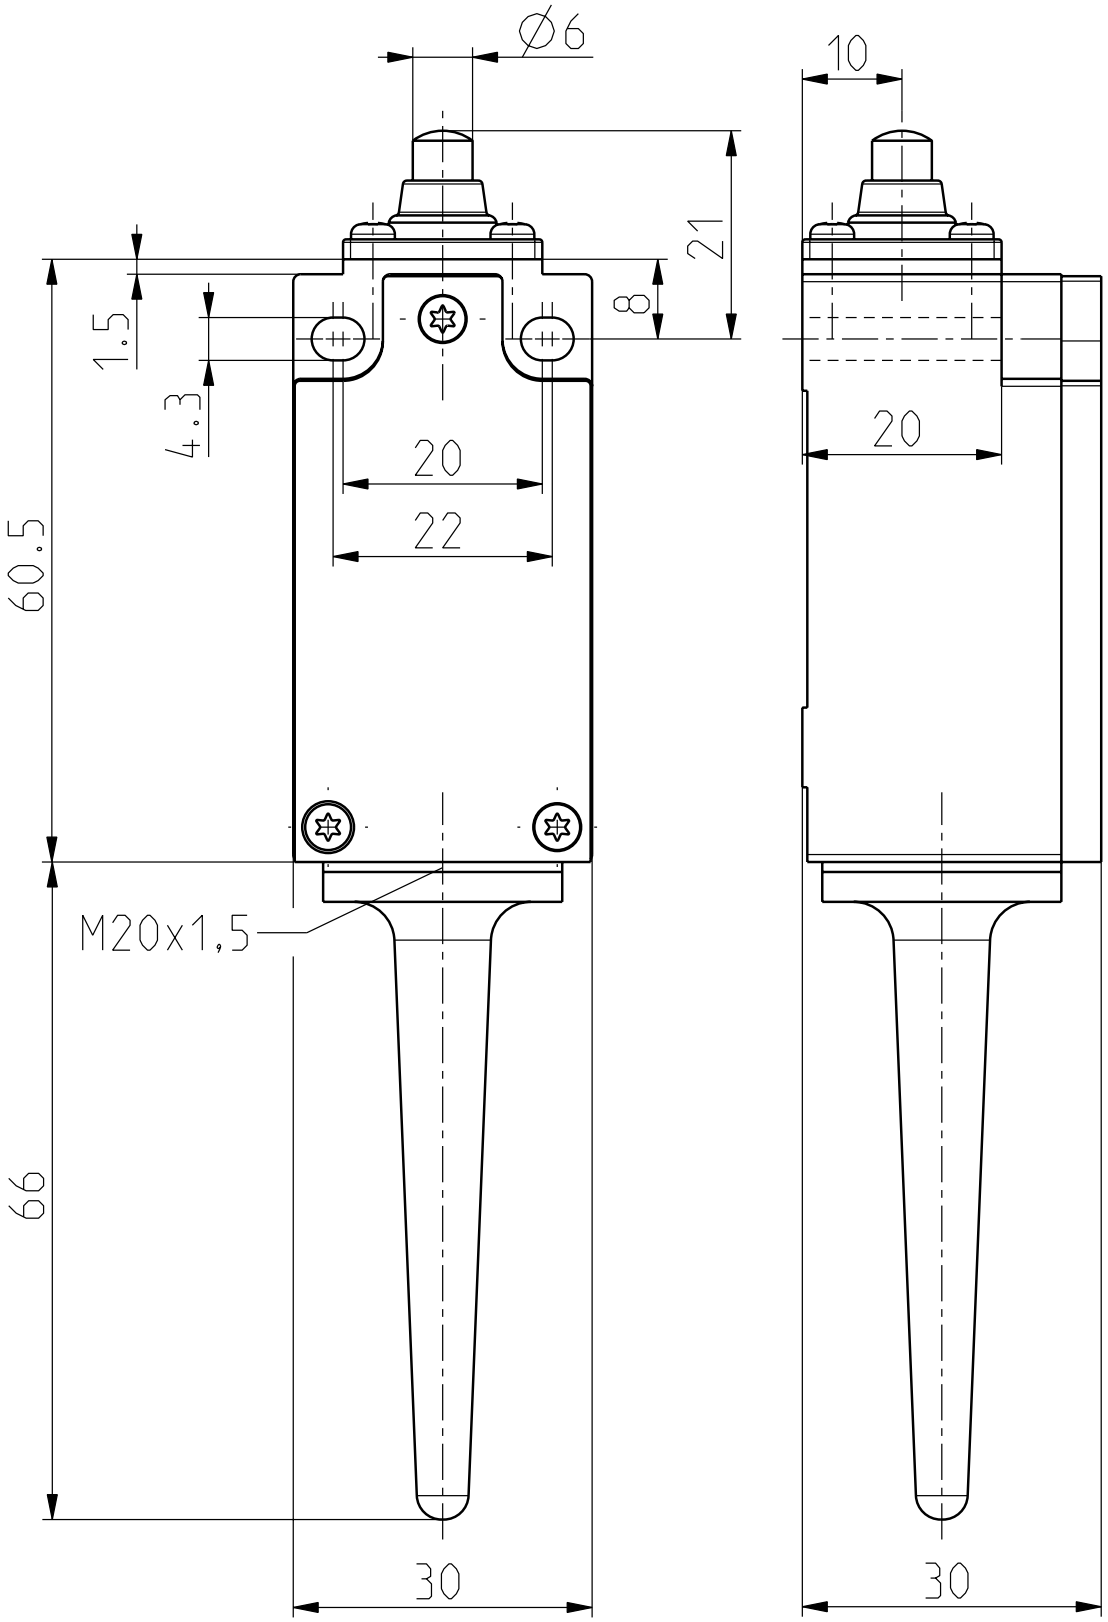

Published on 02 November 2026