

TRA5804001A

IME TRA580 Split Core Current Transformer 400A/1A 80 x 50mm
3VA Class 1, 1.5VA Class 0.5



CURRENT TRANSFORMERS
AND TRANSDUCERS



Component type	Current transformer
Range	Split Core CT
Model	N/A
Product status	Existing

The IME split core current transformers (CT) are a highly accurate and excellent for a retrofit environment, with a broad range of primary current options and window sizes.

ELECTRICAL

Primary rated current	400 A
Secondary current on CT	1 A
Rated operating frequency	47-63 Hz
Max. operating voltage (Umax)	0.72 V
Rated short time thermal current I _{th} (x primary current)	24 kA
Rated continuous thermal current I _{cth} (x primary current)	24 kA
Accuracy class	0.5
Insulation class (IEC 61869-1, 61869-2)	B
Security factor	15
Rated burden, class 0.5	1.5 VA
Rated burden, class 1	3 VA
Power loss	10 W
Secondary rated apparent power	1.5 VA
Calibrated	No

CONSTRUCTION

Current transformer type	Split core
Model	Through-feed current converter
With shock protection	Yes
Snap mounting	No
Secondary connection	Screw connection
Number of primary inputs	1

ENVIRONMENT

Storage temperature	-40...85 °C
---------------------	-------------

TRA5804001A




IME TRA580 Split Core Current Transformer 400A/1A 80 x 50mm
3VA Class 1, 1.5VA Class 0.5



CURRENT TRANSFORMERS
AND TRANSDUCERS

IME

DIMENSIONAL DIAGRAM

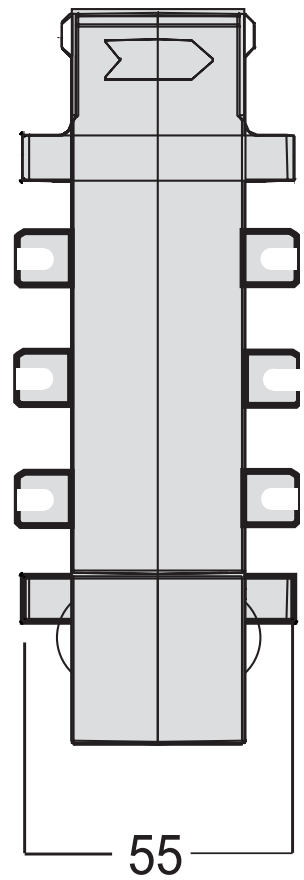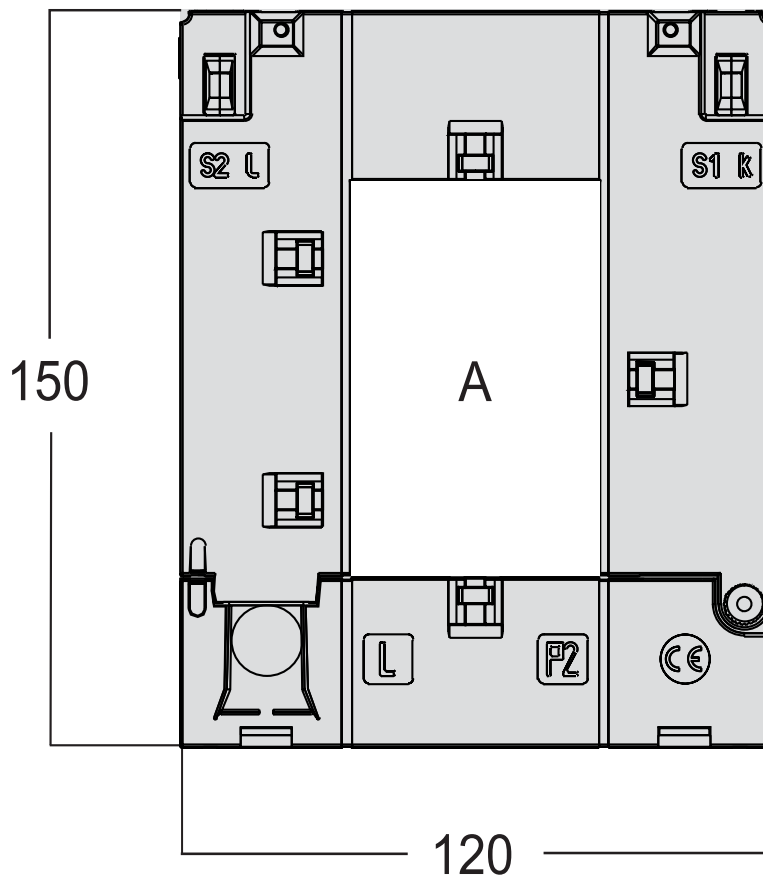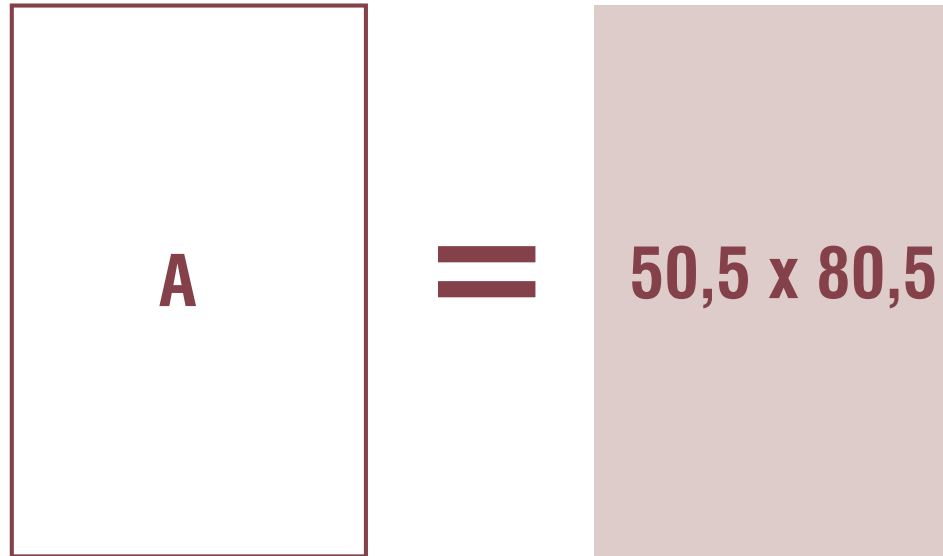

TRA5804001A

IME TRA580 Split Core Current Transformer 400A/1A 80 x 50mm
3VA Class 1, 1.5VA Class 0.5



CURRENT TRANSFORMERS
AND TRANSDUCERS

IME

