

VLB2504P1

Socomec VLB Visual Load Break Switch Kit, w/ External Handle, 4P 250A



LOAD BREAK SWITCHES

socomec
Innovative Power Solutions



Component type	Switch disconnecter
Range	VLB
Model	N/A
Product status	Existing

The Socomec VLB series of load break switches features visible and positive break indication ensuring safe switching. The user can visually assess the condition of the device and confirm isolation during maintenance or prior to operation. Available from 32 to 800A, suitable for safety focus applications and emergency load break with front or side operation based on your installation preference.

ELECTRICAL

Rated permanent current at AC-21, 400 V	250 A
Rated uninterrupted current I _u	250 A
Number of poles	4
Rated operation power at AC-23, 400 V	140 kW
Rated operation current I _e at AC-23a, 400 V	250 A
Rated operation current I _e at AC-23a, 500 V	250 A
Rated operation current I _e at AC-23a, 690 V	250 A
Rated short-time withstand current I _{cw}	17 kA
Rated insulation voltage U _i	800 V
Rated impulse withstand voltage U _{imp}	8 kV
Type of control element	Long turning handle
Rated permanent current at AC-23, 400 V	250 A
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as change-over contact	0

CONSTRUCTION

Degree of protection (IP), front side	IP65
Version as main switch	Yes
Version as reversing switch	No
Number of switches	1
Suitable for front mounting 4-hole	No
Suitable for front mounting centre	No
Suitable for distribution board installation	Yes
Suitable for intermediate mounting	No
Interlockable	Yes

VLB2504P1

Socomec VLB Visual Load Break Switch Kit, w/ External Handle, 4P 250A



LOAD BREAK SWITCHES

socomec
Innovative Power Solutions

MECHANICAL

Padlock locking

Yes

DIMENSIONS

Height

350 mm

Width

294 mm


Depth

95 mm

DIMENSIONAL DIAGRAM

SIDER VLB 250 to 500 A

External front operation

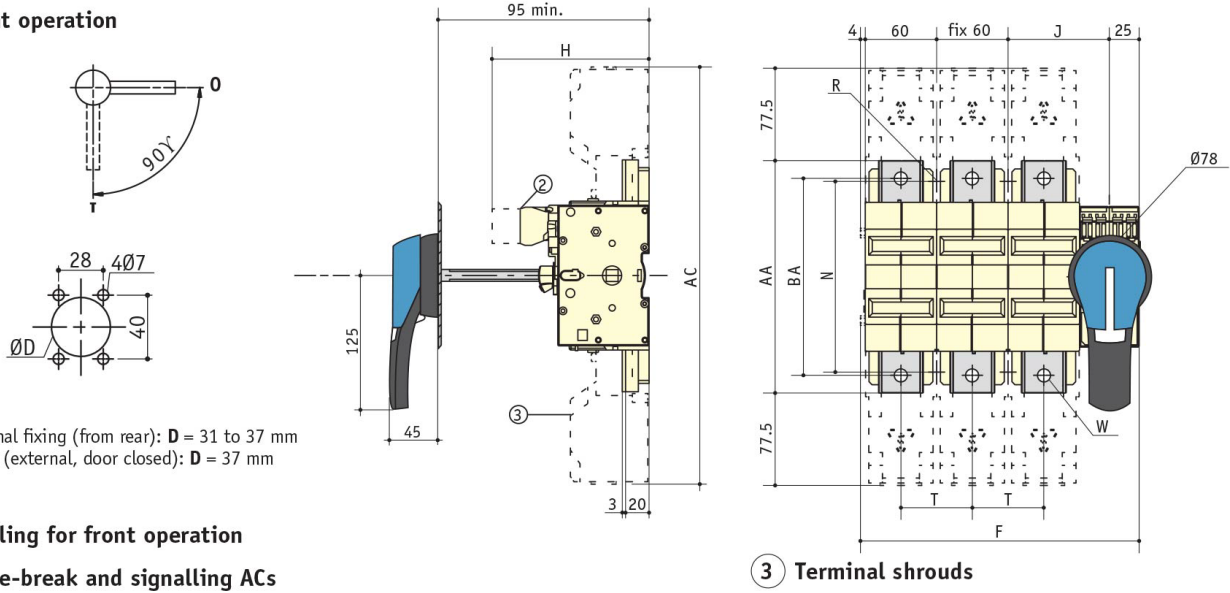

Rating (A)	Terminal shrouds		Switch body		Switch mounting		Connection terminals				
	AC	F 3p.	F 4p.	H	J	N	R	T	W	AA	BA
250	350	234	294	132	85	162	6	60	10	195	165
315	350	234	294	132	85	162	6	60	10	195	165
400	360	252	318	132	91	172	6	66	10	214	175
500	360	252	318	132	91	172	6	66	10	214	175