39990701

Socomec SSF Auxiliary contact, 1 N.O, suits 20 - 1250A

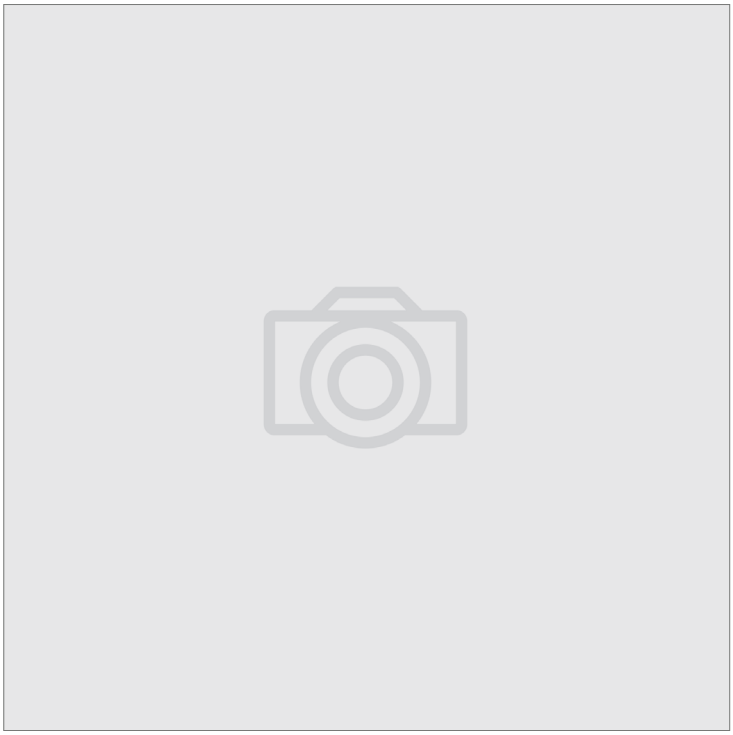

Component type	Auxiliary contact block
Range	Fuse Switch
Model	N/A
Product status	Existing

The Socomec SSF standard fuse switches boast IP 30 protection on all fuse terminals in a compact yet effective design. These fuse switches feature a test position and double-break contacts per phase, allowing the safe isolation of AC or DC circuits as well as the added short circuit protection offered by DIN/BS type HRC fuses.

ELECTRICAL	**Number of contacts as normally open contact**	1
	Rated operation current Ie at AC-15, 240 V	3 A
	Rated operation current Ie at AC-15, 400 V	1.8 A
	Rated operation current Ie at DC-13, 24 V	2.8 A
	Type of electric connection	Screw connection
	Rated operation current Ie at AC-15, 230 V	3 A
CONSTRUCTION	**Mounting method**	Front fastening

Published on 02 November 2026