

800F1YM1

Allen-Bradley 800F Assembled Pls. Station 1 Hole Non Illum.
Twist To Rel. 1 N.C. Yellow 22.5mm PB



PUSHBUTTON AND PILOT LIGHTS



Allen-Bradley



Component type	Control circuit devices combination in enclosure
Range	800F E-Stop
Model	N/A
Product status	Existing

The Allen-Bradley 800F Emergency stop operators are a reliable and durable solution for emergency applications in industrial environments. Available in various actuator sizes, illuminated or non-illuminated with optional key operation and self-monitoring contact block. Suitable for mounting on 22.5mm holes in both thermoplastic and metal types, designed for demanding industrial environments.

CONSTRUCTION

Number of push buttons	1
Number of key switches	1
Number of selector switches	1
Number of mushroom-shaped push-buttons	1
Colour housing cover	Yellow
Material housing	Plastic

MECHANICAL

Max. vibration acceleration	10 m/s²
Max. vibration frequency, operational	2000 Hz
Max. shock acceleration	100 g

ENVIRONMENT

Operating temperature	-25-70
-----------------------	--------

800F1YM1

Allen-Bradley 800F Assembled Pls. Station 1 Hole Non Illum.
Twist To Rel. 1 N.C. Yellow 22.5mm PB




PUSHBUTTON AND PILOT LIGHTS



Allen-Bradley

DIMENSIONAL DIAGRAM

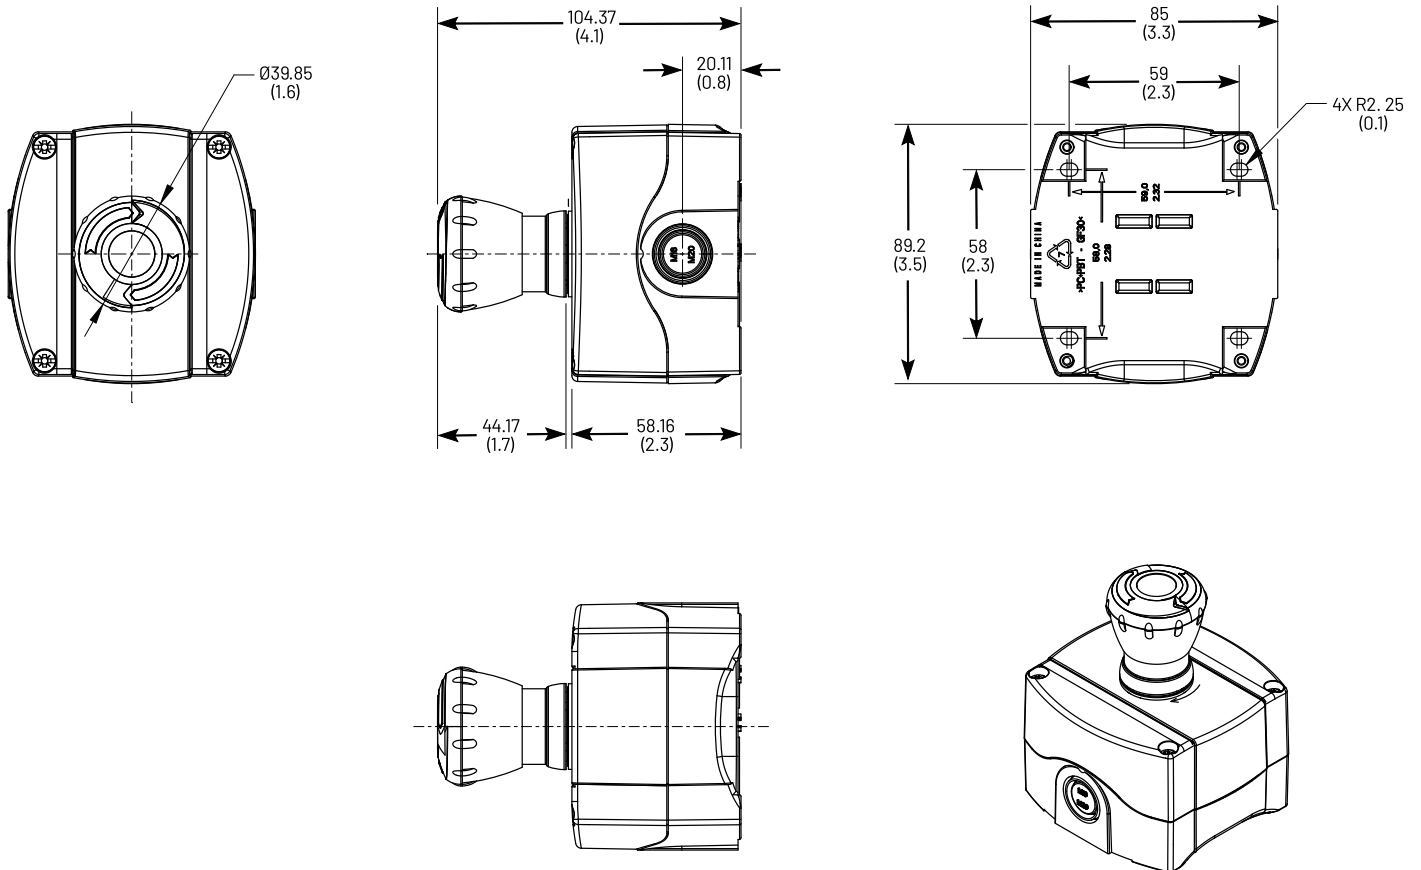

Dimensions are in millimeters (inches).

800F1YM1


Allen-Bradley 800F Assembled Pls. Station 1 Hole Non Illum.
Twist To Rel. 1 N.C. Yellow 22.5mm PB



PUSHBUTTON AND PILOT LIGHTS



Allen-Bradley

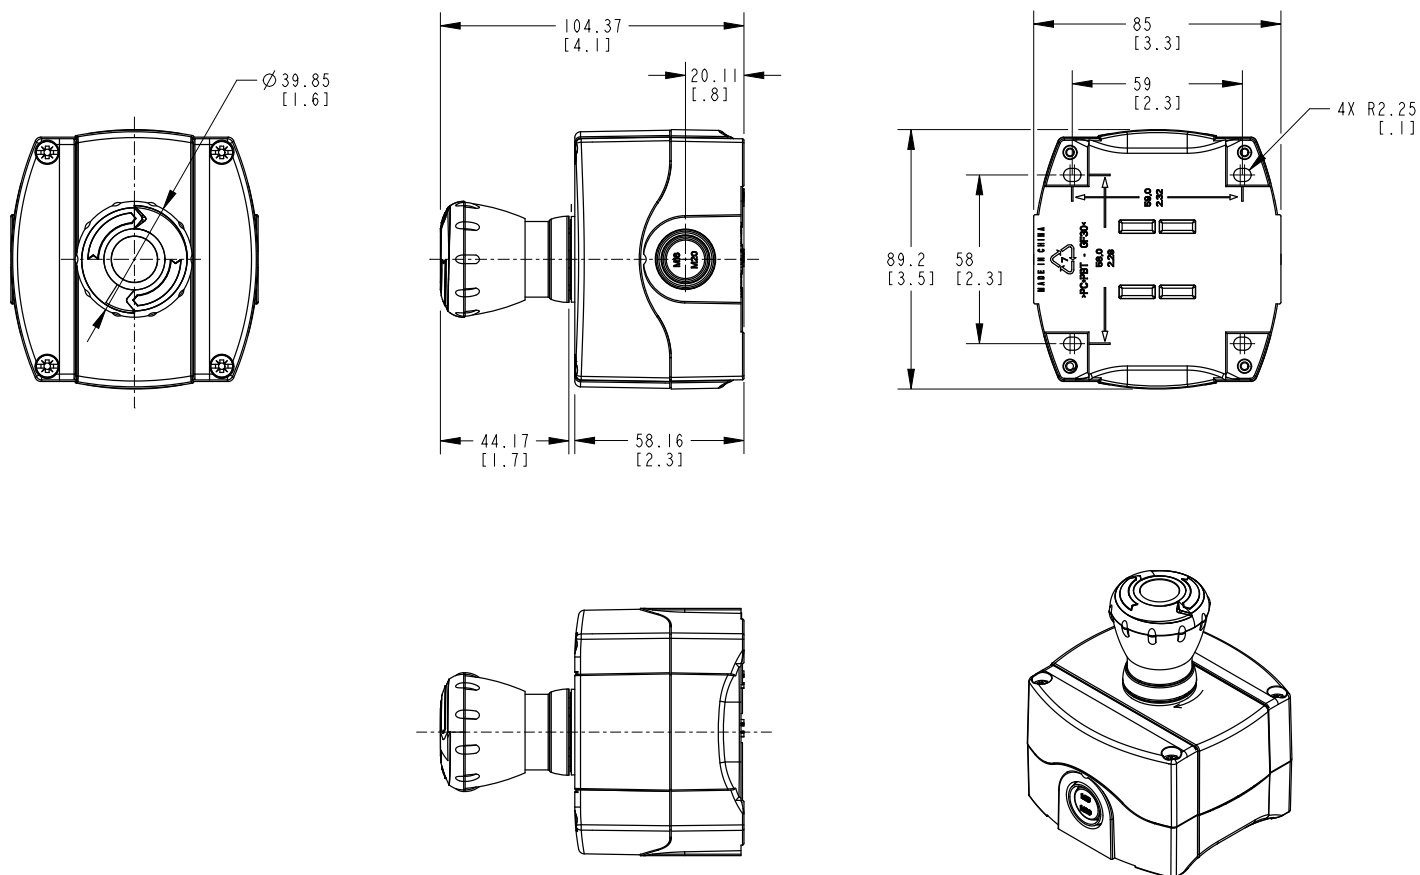

DIMENSIONS IN MILLIMETERS [INCHES].
DIMENSIONS ARE NOT INTENDED TO BE USED IN MANUFACTURING PURPOSES.