

EEX13W1O1S

Steute HAE Limit Switch Ex 1,2,21,22 Safety 40mm Plastic
Plunger w/collar 1NO 1NC Slow 2m



LIMIT SWITCHES

.steute



Component type	Limit switch
Range	HAE Limit Switch
Model	N/A
Product status	Existing

Steute Technologies offer a wide range of explosion-proof HAE position limit switches for industrial applications, with optional safety functions. Explosion-proof limit switches are offered with thermoplastic or metal enclosures with slow or snap action. Ideal for use in areas with hazardous gas, vapours, mists, hazardous powder, dust or in extreme cold (down to -60°C).

ELECTRICAL	Type of electric connection	With cable preassembled
	Rated operation current I _e at AC-15, 230 V	0 A
	Rated operation current I _e at DC-13, 230 V	0.16 A
CONSTRUCTION	Material housing	Plastic
	IP rating	IP67
MECHANICAL	Switching function	Quick-break switch
DIMENSIONS	Cable length	2 m
	Width sensor	40 mm
	Diameter sensor	16 mm

EEX13W1O1S


Steute HAE Limit Switch Ex 1,2,21,22 Safety 40mm Plastic
Plunger w/collar 1NO 1NC Slow 2m



LIMIT SWITCHES

.steute

DIMENSIONAL DIAGRAM

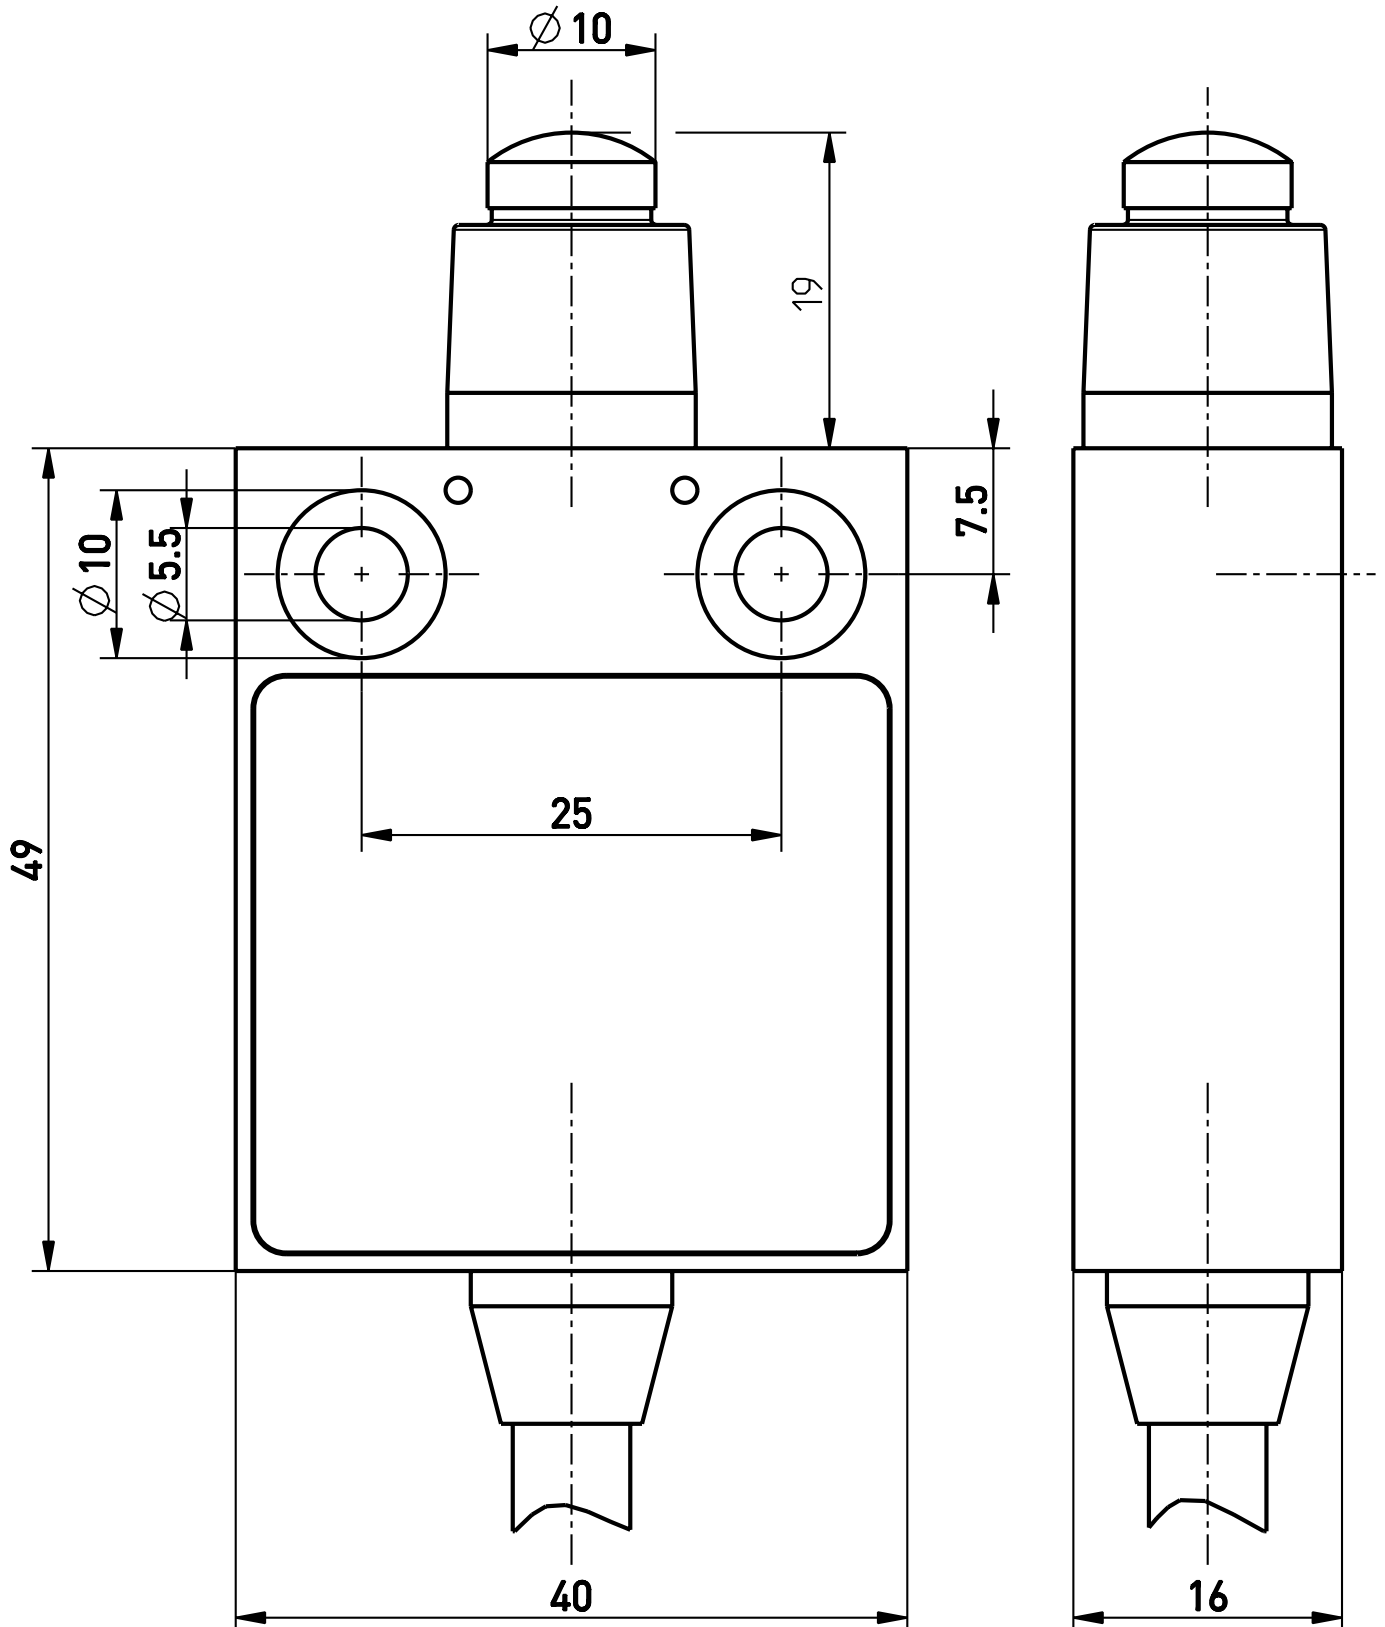

EEX13W1O1S

Steute HAE Limit Switch Ex 1,2,21,22 Safety 40mm Plastic
Plunger w/collar 1NO 1NC Slow 2m



LIMIT SWITCHES

.steute

