EXRF96DSSW915

Steute Wireless Limit Switch Ex 1,2,21,22 Plastic Metal Adjustable Roller Lever with Battery

WIRELESS DEVICES

.steute



Component type	Limit switch
Range	Wireless Limit Switch
Model	N/A
Alternative	CALL FOR ALTERNATIVE

Steute wireless position switches are applied where moving parts of machinery and plant systems must be positioned or switched off. Applications include security tasks in different sectors of industrial building automation, drinking water storage, and regenerative energy supply. Available with metal and thermoplastic enclosures and an electrodynamic energy generator or a lithium-ion battery.

ELECTRICAL	Number of contacts as change-over contact	0
	Type of control element	Roller lever
	Type of electric connection	Cable entry metrical
	Rated operation current Ie at AC-15, 230 V	0 A
	Rated operation current Ie at DC-13, 230 V	0 A
	Forced opening	No
COMMUNICATION	Type of interface	None
	Type of interface for safety communication	None
CONSTRUCTION	Material housing	Plastic
	IP rating	IP67
	Construction type housing	Other
	Alignment of the control element	Other
	Suitable for safety functions	Yes
MECHANICAL	Switching function latching	No
DIMENSIONS	Height of sensor	32 mm
	Length of sensor	181.5 mm
	Width sensor	31 mm
	Diameter sensor	17 mm
ENVIRONMENT	Rated temperature	-20…60 °C
CERTIFICATES/APPROVALS	Explosion safety category for gas	Other
	Explosion safety category for dust	Other

Published on 29 October 2026


EXRF96DSSW915

Steute Wireless Limit Switch Ex 1,2,21,22 Plastic Metal Adjustable Roller Lever with Battery

WIRELESS DEVICES

.steute

DIMENSIONAL DIAGRAM

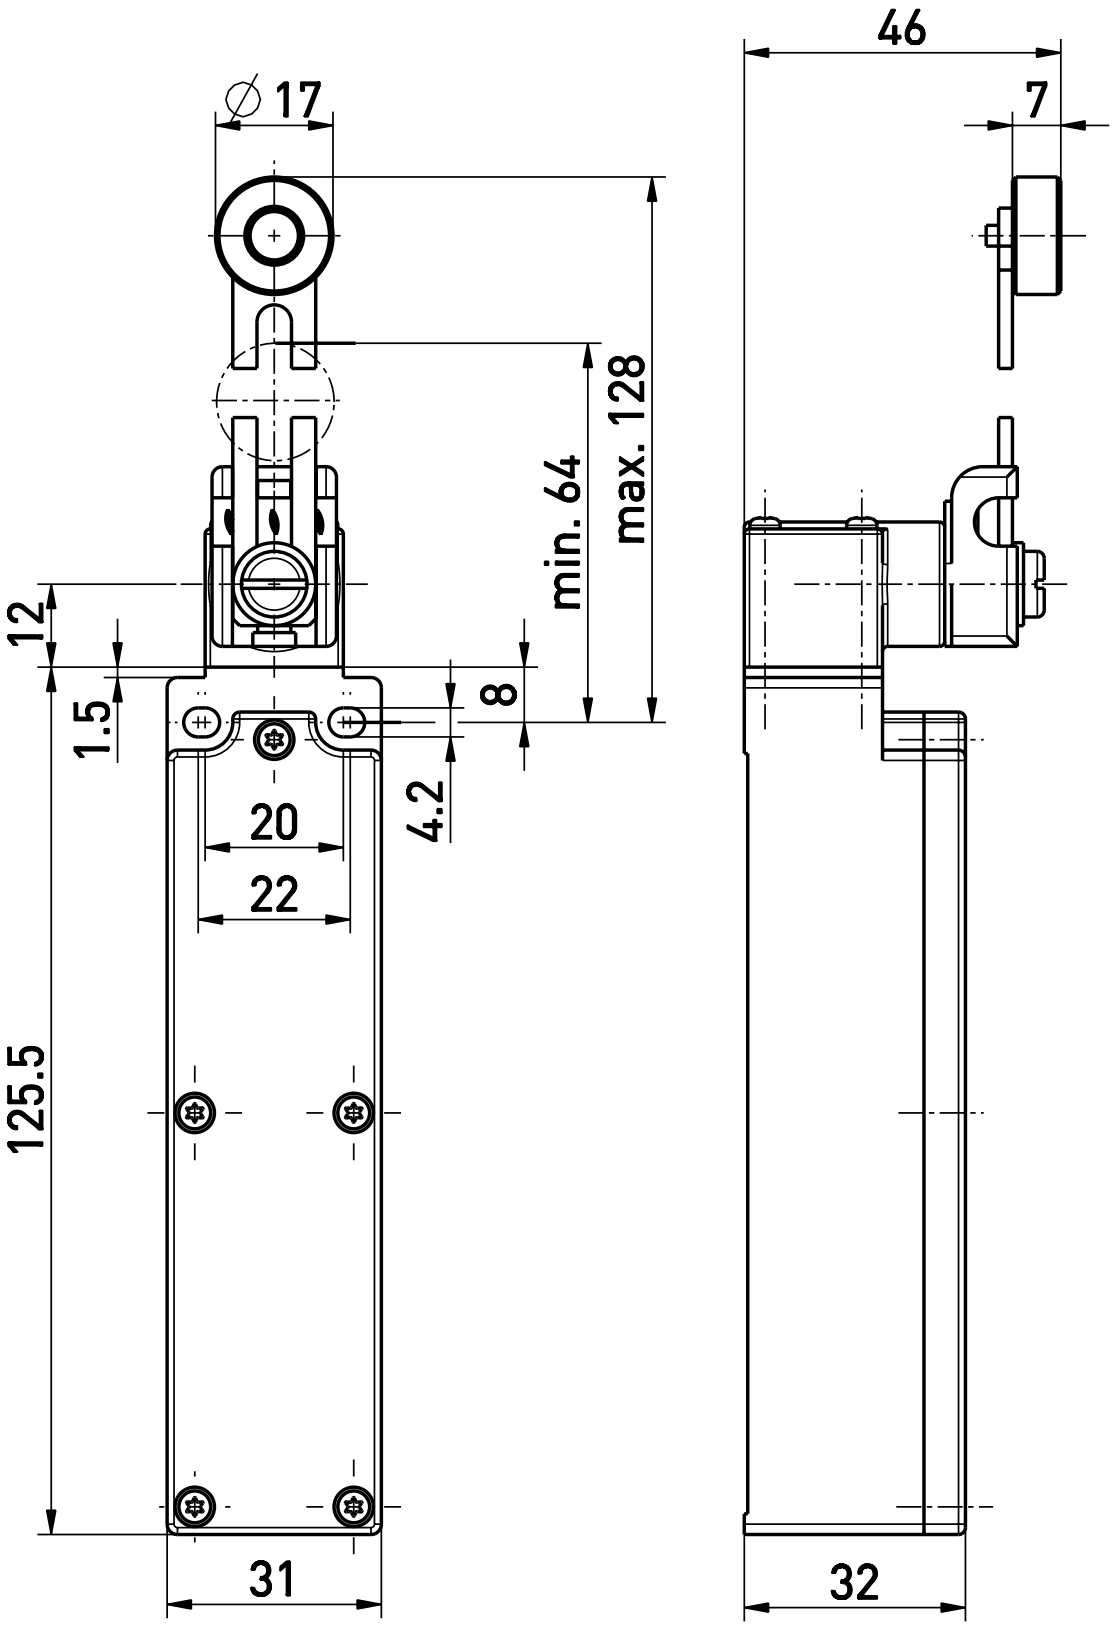

Published on 29 October 2026