

IA18ASN08NCM1

Carlo Gavazzi Inductive Proximity Nickel Brass Short M18 DC
NPN NC Output 8mm Sense plus 5m M12




NON-CONTACT SENSORS



Component type	Inductive proximity switch
Range	Inductive Prox
Model	N/A
Alternative	NO ALTERNATIVE ITEM

The Carlo Gavazzi Inductive Proximity Sensors are a reliable and contactless solution in the detection of machinery and automation equipment. Available in a variety of styles and resistant to high level shock and vibration. Able to withstand wide temperature variations and voltage peaks of up to 200V making them ideal for high pressure and high temperature wash-down environments.

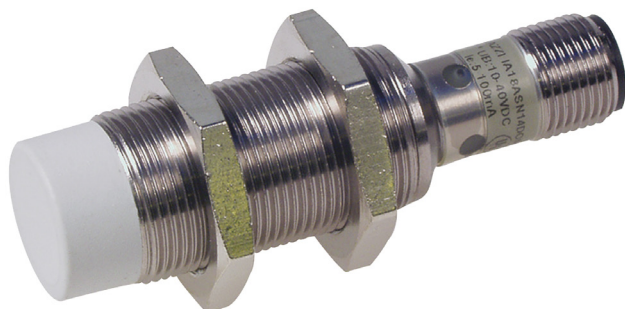

ELECTRICAL

Type of actuation	Metallic Target
Switching distance	8 mm
Voltage type	DC
Rated control supply voltage U_s at DC	12-36 V
Type of switch function	Breaker contact
Type of switching output	NPN
Switching frequency	400 Hz
Type of electric connection	Flat plug-in connection
Voltage drop (U_d)	2.5 V
Supply voltage	12-36 V
Number of protected semiconductor outputs	1

COMMUNICATION

Type of interface	None
Construction type housing	Cylinder, screw-thread
Material housing	Metal
IP rating	IP67
Coating housing	Nickel-plated
Cascadable	No
Compression-resistant	No
Suitable for safety functions	No

CONSTRUCTION

MECHANICAL

Mechanical mounting condition for sensor	Other
Diameter sensor	18 mm
Length of sensor	38 mm
Cable length	0 m
Weight (cable excluded)	120 g

DIMENSIONS

ENVIRONMENT

Storage temperature	-30...80 °C
---------------------	-------------

CERTIFICATES/APPROVALS

SIL according to IEC 61508	None
----------------------------	------

IA18ASN08NCM1

Carlo Gavazzi Inductive Proximity Nickel Brass Short M18 DC
NPN NC Output 8mm Sense plus 5m M12



NON-CONTACT SENSORS



CERTIFICATES/APPROVALS	Explosion safety category for gas	None
	Explosion safety category for dust	None