
IMCBHMAC

ProSoft Gateway Ethernet to Belden 9463 Blue Hose Industrial Media Converters Non-CE

GATEWAYS AND TRANSLATORS

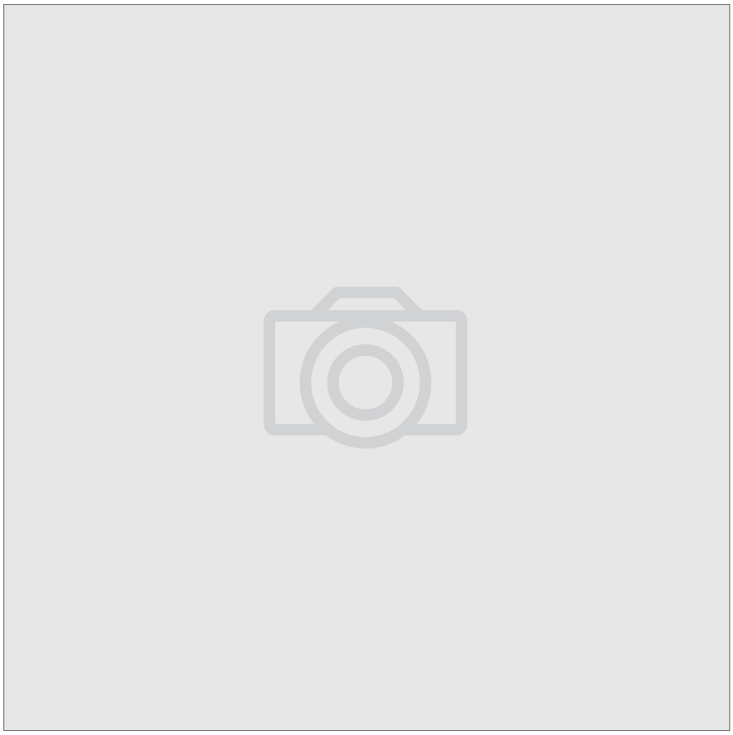

Component type	Fieldbus, decentr. periphery - communication module
Range	Stand-alone
Model	N/A
Alternative	NO ALTERNATIVE ITEM

ProSoft Technology stand-alone DIN rail-mounted industrial gateways provide an easy-to-use solution to read or write data from devices using different protocols. All ProSoft gateways are equipped with ProSoft Discovery Service (PDS) software which automatically detects the default IP address without being on the same subnet, saving setup time and enabling faster network configuration.

ELECTRICAL	**Supply voltage DC**	10-36 V
	Voltage type of supply voltage	AC
	Supply voltage AC 50 Hz	120-240 V
	Supply voltage AC 60 Hz	120-240 V
CONSTRUCTION	**IP rating**	IP20
DIMENSIONS	**Width**	6.7 mm
	Height	21 mm
	Depth	1.9 mm

Published on 06 July 2026