ISO340SSYS

Socomec ISO Enclosed Isolator, IP 65 Stainless Steel, Handle - Red, 3P 40A

ENCLOSED ISOLATORS



Component type	Switch disconnector
Range	ISO
Model	N/A
Product status	Existing

The Socomec ISO enclosed isolators deliver IP65, wall mountable, switching solutions ensuring coverage for any application. With a choice of plastic, aluminium and 316 stainless steel enclosures ranging from 25A to 250A, the range suits all environments. All handles allow for up to 3 padlocks in the OFF position and enclosure interlocking when in the ON position.

ELECTRICAL	Rated uninterrupted current Iu	40 A
	Number of poles	3
	Frequency	50/60 Hz
	Rated operation current Ie at AC-23a, 690 V	40 A
	Rated short-time withstand current Icw	2.5 kA
	Type of electrical connection of main circuit	Screw connection
	Rated operating voltage	690 V
	Conditioned rated short-circuit current Iq	50 kA
	Number of auxiliary contacts as normally closed contact	0
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as change-over contact	0
	Motor drive integrated	No
CONSTRUCTION	Colour control element	Red
	Degree of protection (IP), front side	IP65
	Degree of protection (NEMA)	4X
	Version as reversing switch	No
	Number of switches	1
	Interlockable	No
MECHANICAL	Padlock locking	Yes
DIMENSIONS	Height	159 mm
	Width	150 mm
	Depth	120 mm
	Connectable conductor cross section	1.5-16 mm²


Published on 02 November 2026


ISO340SSYS


Socomec ISO Enclosed Isolator, IP 65 Stainless Steel, Handle - Red, 3P 40A

ENCLOSED ISOLATORS

DIMENSIONAL DIAGRAM

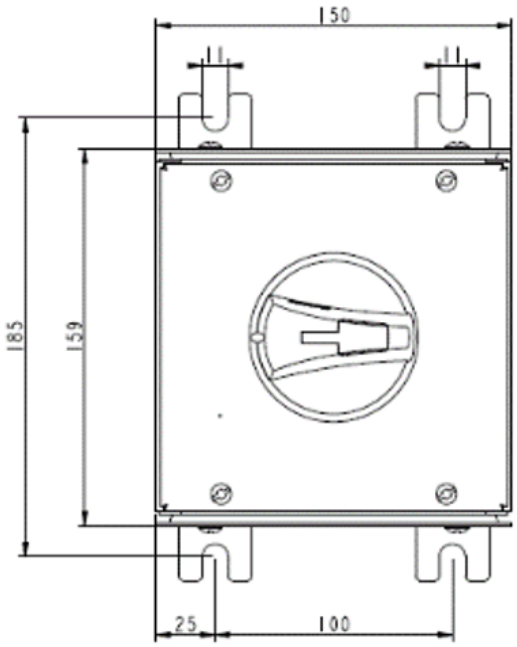

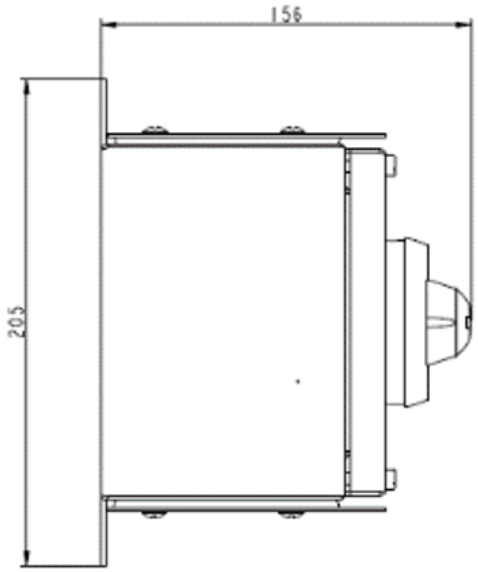

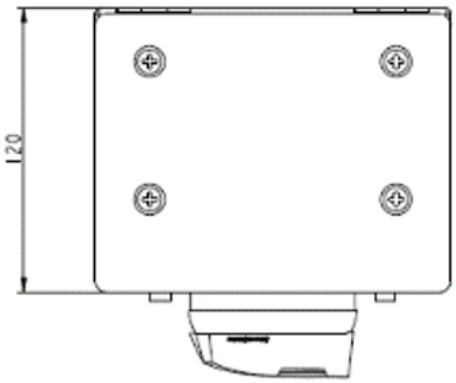

Published on 02 November 2026