

ISOK2SW350PROLB

NHP ISO Surface Switch - Key, Lock in ON/OFF, 3 Pole 50A 500V AC, w/o Base, Resistant Orange



ISO

INDUSTRIAL PLUGS AND SOCKETS



Component type	Switch disconnector
Range	ISO
Model	N/A
Product status	Existing

The often overlooked essentials that are always indispensable. Choose from NHP's range of 400+ industrial, isolating and high-current plugs, sockets and switches available for a wide breadth of applications.

ELECTRICAL

Rated operating voltage Ue	500 V
Rated uninterrupted current Iu	50 A
Number of poles	3
Frequency	50 Hz
M rating	M200
Rated operation current Ie at AC-23a, 500 V	50 A
Rated operating voltage	500 V

CONSTRUCTION

Material housing	Plastic
Colour control element	Grey
Degree of protection (IP), front side	IP66
Degree of protection (NEMA)	4X
Version as reversing switch	No

MECHANICAL

Padlock locking	Yes
-----------------	-----

DIMENSIONS

Height	101 mm
Width	101 mm
Depth	54 mm
Connectable conductor cross section	10-16 mm ²


ISOK2SW350PROLB

NHP ISO Surface Switch - Key, Lock in ON/OFF, 3 Pole 50A 500V
AC, w/o Base, Resistant Orange




ISO
INDUSTRIAL PLUGS AND SOCKETS


DIMENSIONAL DIAGRAM

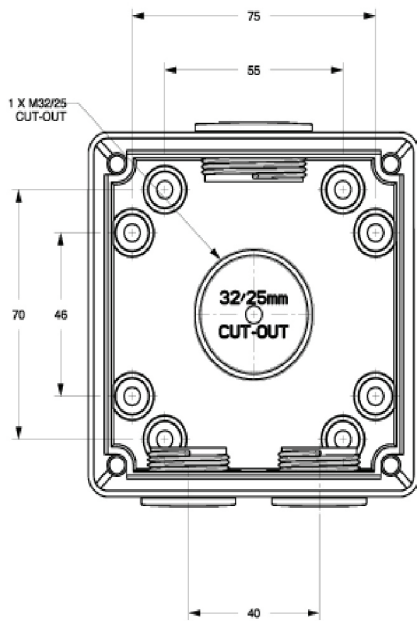

FRONT MOUNTING ENCLOSURE

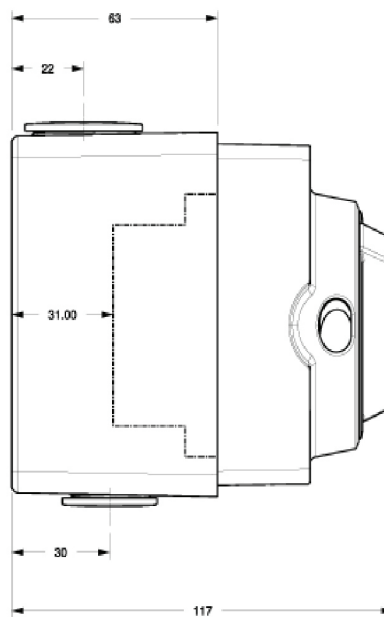

SIDE COMPLETE

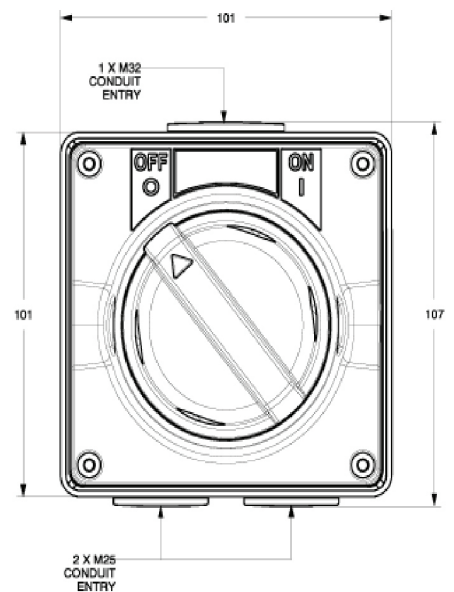

FRONT COMPLETE

All dimensions in mm

ISOK2SW350PROLB

NHP ISO Surface Switch - Key, Lock in ON/OFF, 3 Pole 50A 500V
AC, w/o Base, Resistant Orange



ISO
INDUSTRIAL PLUGS AND SOCKETS

