

MOLED40102A

Moflash LED401 144 LEDS Steady/Flashing Rotating Mode IP65
24VDC and 90-370 DC W/ S Mnt Amber



MOFLASH
SIGNALLING



Component type	Signalling device
Range	LED Beacon
Model	N/A
Product status	Existing

The Moflash range of LED Beacons are a highly efficient and durable visual signalling solution for industrial and commercial applications. LED technology ensures a bright output, visible from a distance with a wide choice of colours, sizes, outputs, configurations, voltages, mounting options and a variety of operation modes such as flashing or rotating.

ELECTRICAL	Nominal voltage	24-24 V
	Type of current	DC
	Electricity consumption	0.2 A
COMMUNICATION	Compatible with Apple HomeKit	No
	Compatible with Google Assistant	No
	Compatible with Amazon Alexa	No
CONSTRUCTION	Type of indication	Optic
	Colour of lamp hood	Orange
	Mounting method	Other
	Colour housing	Black
	IP rating	IP65
MECHANICAL	Suitable for ceiling mounting	Yes
PHOTOMETRIC	Lamp type	LED
	Illumination mode	Round flashing light
DIMENSIONS	Weight	0.6 kg
ENVIRONMENT	Rated temperature	-20...45 °C

MOLED40102A


Moflash LED401 144 LEDS Steady/Flashing Rotating Mode IP65
24VDC and 90-370 DC W/ S Mnt Amber



BEACONS

MOFLASH
SIGNALLING

DIMENSIONAL DIAGRAM

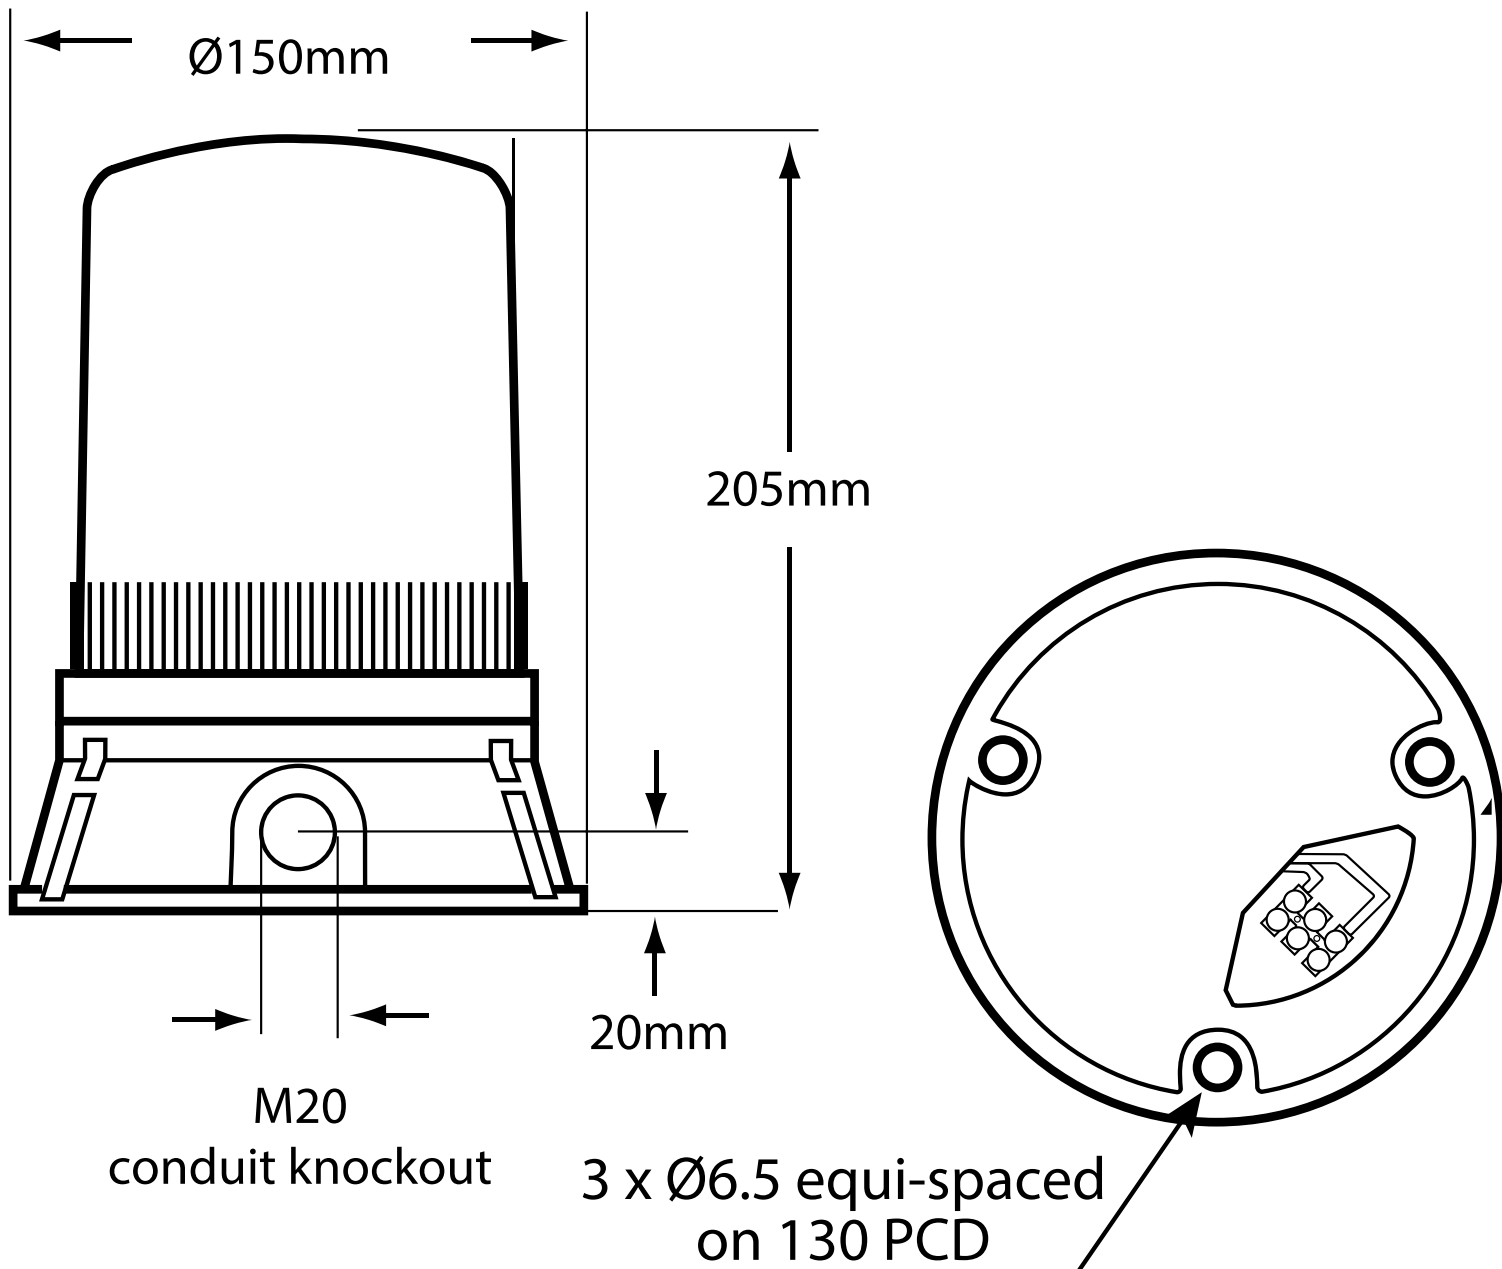


MOLED40102A

Moflash LED401 144 LEDS Steady/Flashing Rotating Mode IP65
24VDC and 90-370 DC W/ S Mnt Amber



MOFLASH
SIGNALLING

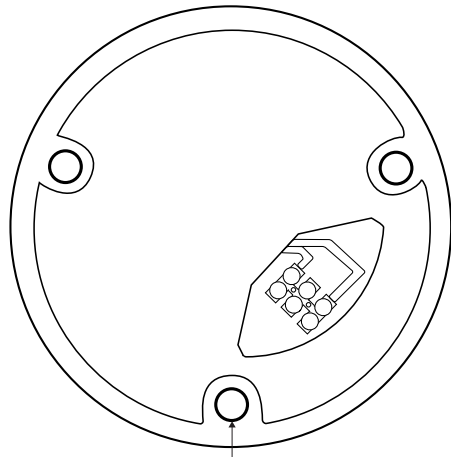

3 holes x Ø6.5mm
equi-spaced on 130 PCD

