
# V5AR418

**PROCONECT 3PV5 Appliance Inlet, 3P+N+E+2p, 320A, suits 185mm2 cable, w/ Crimp Terminals**

HIGH CURRENT PLUGS

PROCONECT®

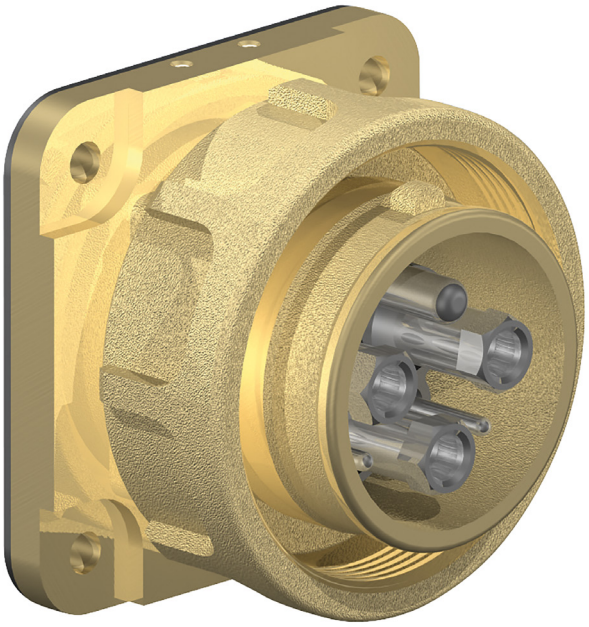

| | |
|---|---|
| **Component type** | Round socket/plug for high currents |
| **Range** | 3PX/3PV |
| **Model** | N/A |
| **Product status** | Existing |

The Proconect 3PX and 3PV range of high-current plugs and sockets suit a variety of industries including mining, marine, transportation, and commercial. Available in either a screw ring (3PV) or push-pull connection (3PX) type. Current ratings of 160A to 660A (at 3.3 kV) and corrosion-proof aluminium construction make it ideal for the harsh Australian environment.

| | | |
|---|---|---|
| **ELECTRICAL** | Amperage | 320 A |
| | Voltage | 1-3300 V |
| | Contact configuration | 3P+N+E+2P |
| **CONSTRUCTION** | Construction type | Inlet |
| | Material insulation body | Other |
| | IP rating | IP67 |
| **DIMENSIONS** | Width | 158 mm |
| | Length | 158 mm |
| | Height | 109 mm |
| | Weight | 3 kg |
| **ENVIRONMENT** | Operating temperature | -30…60 °C |





Published on 04 September 2026


# V5AR418

**PROCONECT 3PV5 Appliance Inlet, 3P+N+E+2p, 320A, suits 185mm2 cable, w/ Crimp Terminals**

HIGH CURRENT PLUGS

PROCONECT®

## DIMENSIONAL DIAGRAM

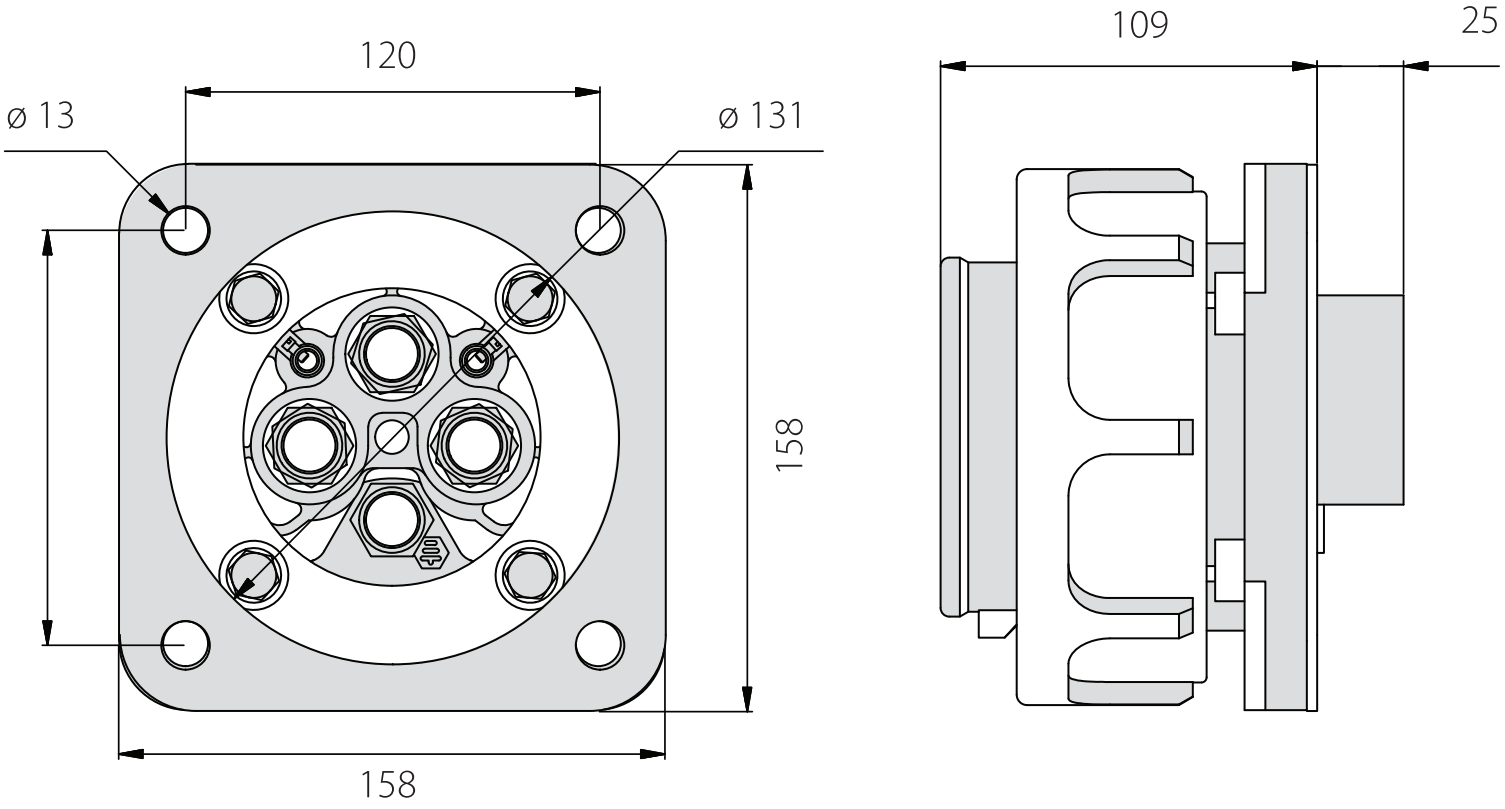




Published on 04 September 2026