

194S0436

Socomec P44-QCT 3Ph CT 23-250A 21 x 21mm Holes 35mm Centres 1m Cable



CURRENT TRANSFORMERS
AND TRANSDUCERS

socomec
Innovative Power Solutions



Component type	Current transformer
Range	Countis P QCT
Model	N/A
Product status	Existing

The Socomec Countis P QCT range is a powerful, space-saving Quick Connect multifunction meter solution for dual (2QCT) and quad (4QCT) load monitoring. These Modbus (RS485) comms-enabled meters measure all system variables, including THDi & THDv. With a wide current range of 40A to 1000A, the Countis P QCT range is a quick and easy solution for multiload monitoring in panelboards and switchboards.

ELECTRICAL

Primary rated current	250 A
Rated operating frequency	50-60 Hz
Max. operating voltage (Umax)	600 V
Accuracy class	1
Over current limiting factor	FS 10

CONSTRUCTION

Current transformer type	Solid core
Material housing	Plastic
Secondary connection	Plug-in connection

DIMENSIONS

Opening diameter	21 mm
Height opening	21-21 mm
Width opening	21-21 mm

ENVIRONMENT

Storage temperature	-25...85 °C
---------------------	-------------

194S0436


Socomec P44-QCT 3Ph CT 23-250A 21 x 21mm Holes 35mm
Centres 1m Cable



CURRENT TRANSFORMERS
AND TRANSDUCERS

socomec
Innovative Power Solutions

DIMENSIONAL DIAGRAM

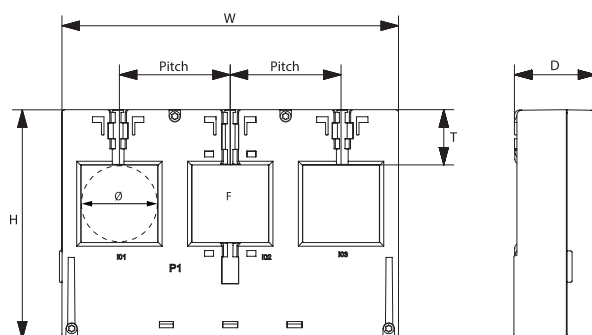

Model	Pitch (mm)	H x W x D (mm)	T (mm)	ØF (mm)
QCT-C-25	24.8	71 X 75 X 32.8	17.5	13.5
QCT-C-35	35	78 x 105 x 32.8	17.5	21
QCT-C-45	45	92 x 135 x 32.8	19.5	31
QCT-C-55	55	106 x 165 x 32.8	21.5	41

194S0436


Socomec P44-QCT 3Ph CT 23-250A 21 x 21mm Holes 35mm
Centres 1m Cable



CURRENT TRANSFORMERS
AND TRANSDUCERS

socomec
Innovative Power Solutions

ELECTRICAL CONNECTION DIAGRAM

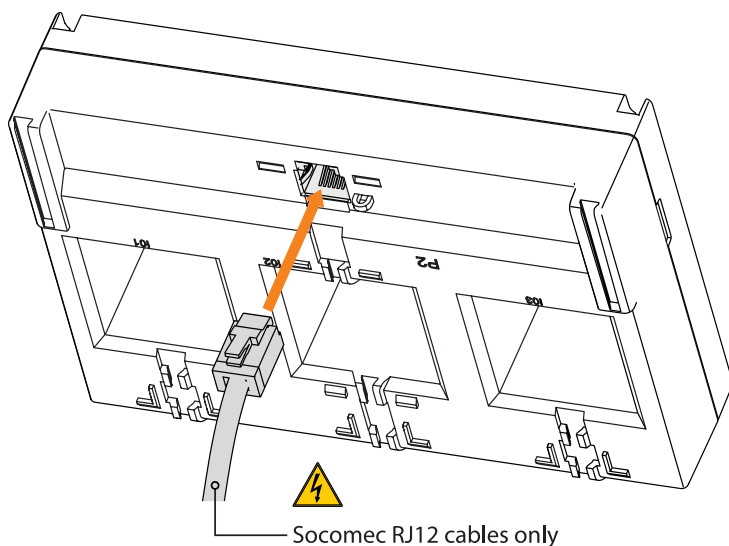

Use only with COUNTIS P44-2QCT or P44-4QCT.
Not compatible with DIRIS Digiware.