# 32BR3208

**Socomec 32BR Load Break Switch kit w/ External Side Op. Handle and Door Interlock, 3P 80A**

LOAD BREAK SWITCHES



| | |
|---|---|
| **Component type** | Switch disconnector |
| **Range** | 32BR |
| **Model** | N/A |
| **Product status** | Existing |

The side operated 32BR series of load break switch kits include a red external side mount handle, shaft and additional door interlock from 50 to 800A. Ideal for applications requiring a high degree of safety when isolating supply and equipment. Visible breaking and positive break indication included via gaps on the front of the switch for checking the status of the device during preventive checks.

| | | |
|---|---|---|
| **ELECTRICAL** | **Rated permanent current at AC-21, 400 V** | 80 A |
| | **Rated uninterrupted current Iu** | 80 A |
| | **Number of poles** | 3 |
| | **Rated operation power at AC-23, 400 V** | 30 kW |
| | **Rated operation current Ie at AC-23a, 400 V** | 63 A |
| | **Rated operation current Ie at AC-23a, 500 V** | 20 A |
| | **Rated insulation voltage Ui** | 690 V |
| | **Rated impulse withstand voltage Uimp** | 6 kV |
| **DIMENSIONS** | **Height** | 123 mm |
| | **Width** | 105 mm |
| | **Depth** | 50.5 mm |
| | **Weight** | 0.5 kg |




Published on 01 October 2026


# 32BR3208


**Socomec 32BR Load Break Switch kit w/ External Side Op. Handle and Door Interlock, 3P 80A**

LOAD BREAK SWITCHES


## DIMENSIONAL DIAGRAM

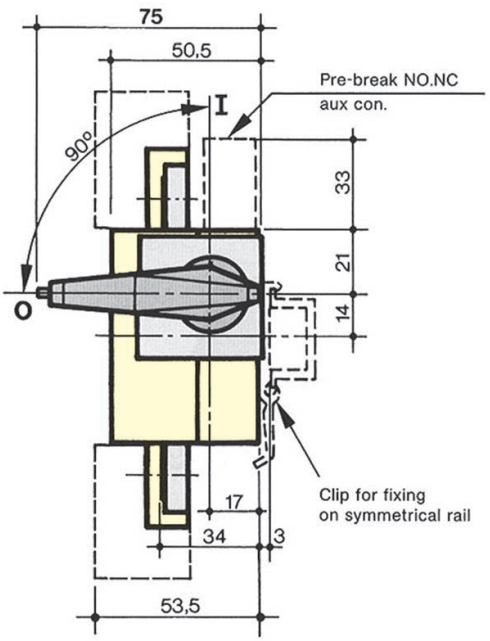

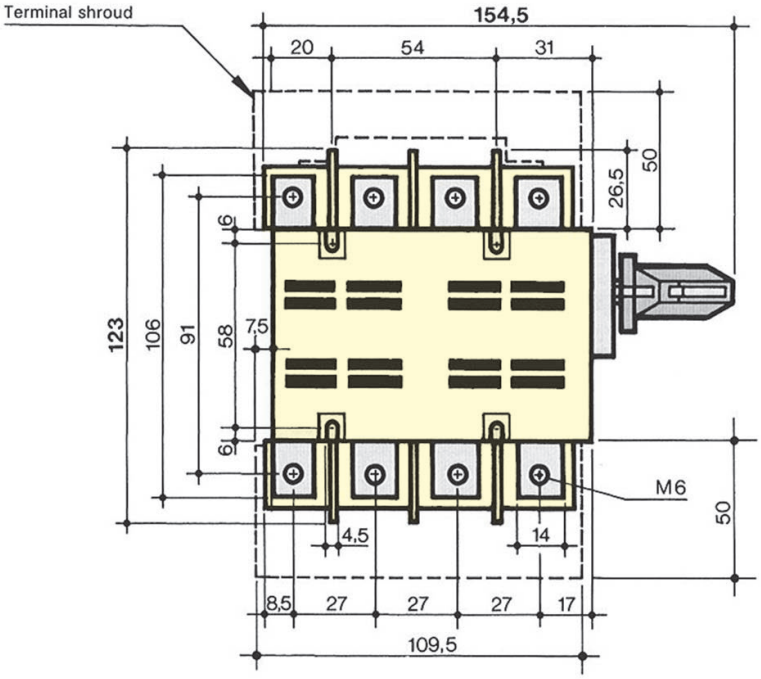
**Door drilling**




*with shaft extension

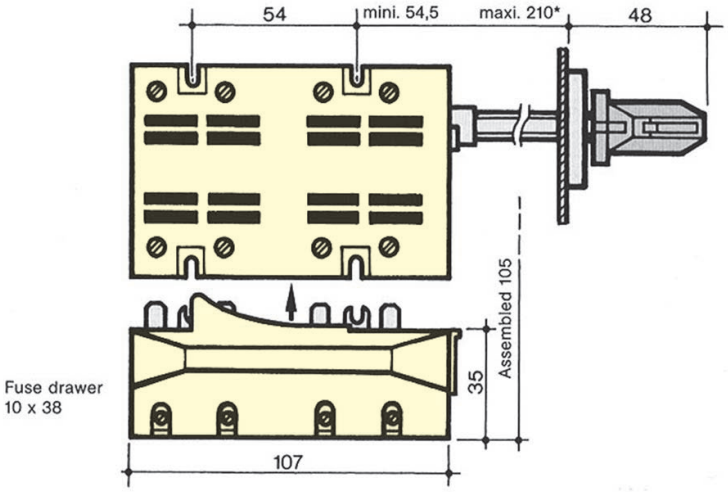

Published on 01 October 2026