2080LC2020QBB

Allen-Bradley Micro820 Controller 8DI 4Ai Configurable 7DO Source 1AO Ethernet RS232/485 24VDC

MICRO CONTROL SYSTEMS



Component type	PLC CPU-module
Range	Micro 800
Model	820
Alternative	2080L20E20QBB

Allen-Bradley Micro800 controllers offer both a scalable and robust micro control solution for small to large standalone applications and allow for customisation and flexibility. You can elect from a wide range of plug-in modules to match your requirements and make use of Connected Components Workbench™ software to help reduce machine design time and maximise productivity.

ELECTRICAL	Supply voltage DC	24 V
	Voltage type of supply voltage	DC
	With optical interface	No
	Redundancy	No
COMMUNICATION	Number of HW-interfaces industrial Ethernet	1
	Max. number of EtherNet/IP nodes	20
	Can be programmed with Connected Components Workbench	Yes
	Can be programmed with Studio 5000 Logix Designer	No
	Can be programmed with RSLogix 500	No
	Supporting protocol for TCP/IP	Yes
	Supporting protocol for PROFIBUS	No
	Supporting protocol for CAN	No
	Supporting protocol for INTERBUS	No
	Supporting protocol for ASI	No
	Supporting protocol for KNX	No
	Supporting protocol for Modbus	Yes
	Supporting protocol for Data-Highway	No
	Supporting protocol for DeviceNet	No
	Supporting protocol for SUCONET	No
	Supporting protocol for LON	No
	Supporting protocol for PROFINET IO	No
	Supporting protocol for PROFINET CBA	No
	Supporting protocol for SERCOS	No
	Supporting protocol for Foundation Fieldbus	No
	Supporting protocol for EtherNet/IP	Yes

Published on 01 June 2026

2080LC2020QBB

Allen-Bradley Micro820 Controller 8DI 4Ai Configurable 7DO Source 1AO Ethernet RS232/485 24VDC

MICRO CONTROL SYSTEMS

Allen-Bradley

COMMUNICATION	Supporting protocol for AS-Interface Safety at Work	No
	Supporting protocol for DeviceNet Safety	No
	Supporting protocol for INTERBUS-Safety	No
	Supporting protocol for PROFIsafe	No
	Supporting protocol for SafetyBUS p	No
	Supporting protocol for other bus systems	Yes
	IO link master	No
CONSTRUCTION	Number of relay outputs	0
	Number of analogue outputs	1
	Number of analogue inputs	4
	Number of digital inputs	12
	Number of digital outputs	8
	Memory size	20 MB
	Additional program memory possible	No
	Suitable for safety functions	No
	Model	Modular
	System accessory	No
	With display	No
	Rail mounting possible	Yes
	Wall mounting/direct mounting	Yes
	Front built-in possible	Yes
	Rack-assembly possible	Yes
DIMENSIONS	Width	104 mm
	Height	90 mm
	Depth	75 mm

Published on 01 June 2026


2080LC2020QBB

Allen-Bradley Micro820 Controller 8DI 4Ai Configurable 7DO Source 1AO Ethernet RS232/485 24VDC

MICRO CONTROL SYSTEMS

Allen-Bradley

DIMENSIONAL DIAGRAM

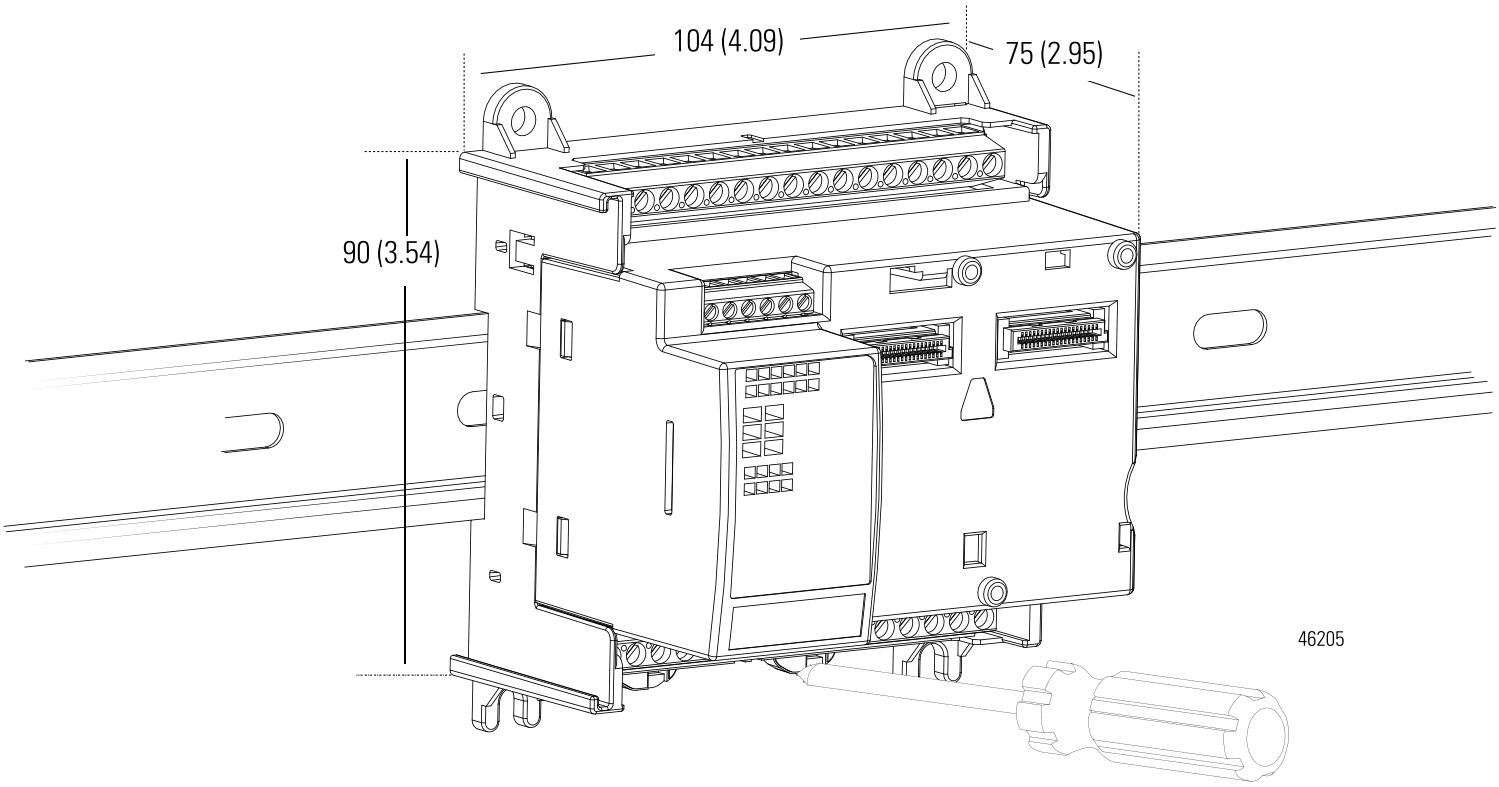

Measurements in millimeters (inches)

RELATED PRODUCTS

ACCESSORY



Item No: 2080PS120240VAC
Required: No
Description: Allen-Bradley Micro800 Power Supply 110-240VAC to 24VDC 1.6A

Item No: 2080USBPRGCAB
Required: No
Description: Allen-Bradley Micro800 Programming Cable USB Type A/B Male to Male

Published on 01 June 2026