ARCLORS5I3O24VDCPLS

NHP Arclogix Optical RS Arc Detection Relay 5I and 3O DIN Mount

ARCLOGIX
ARC FLASH DETECTION



Component type	Arc detection system
Range	Arclogix
Model	N/A
Product status	Existing

NHP's Arclogix Arc Flash relay range optically detects electrical arcs in switchboards and quickly trips circuit breakers, limiting potential damage and expensive downtime. Essential for facilities that rely on electrical power, NHP's Arclogix Arc Flash relay range provides operational protection and confidence, knowing that you are protected against electrical arcs.

ELECTRICAL	**Voltage type for actuating**	AC/DC
	Rated control supply voltage Us at AC 50HZ	19-65 V
	Rated control supply voltage Us at DC	19-85 V
	Max. flash to trip duration	7 ms
	Number of inputs	5
	Number of contacts as normally open contact	3
CONSTRUCTION	**Mounting method**	DIN rail
DIMENSIONS	**Height**	65 mm
	Depth	124 mm
ENVIRONMENT	**Operating temperature**	-10…55 °C
	Storage temperature	-25…70 °C


Published on 30 September 2026

ARCLORS5I3O24VDCPLS

NHP Arclogix Optical RS Arc Detection Relay 5I and 3O DIN Mount

ARCLOGIX
ARC FLASH DETECTION

DIMENSIONAL DIAGRAM

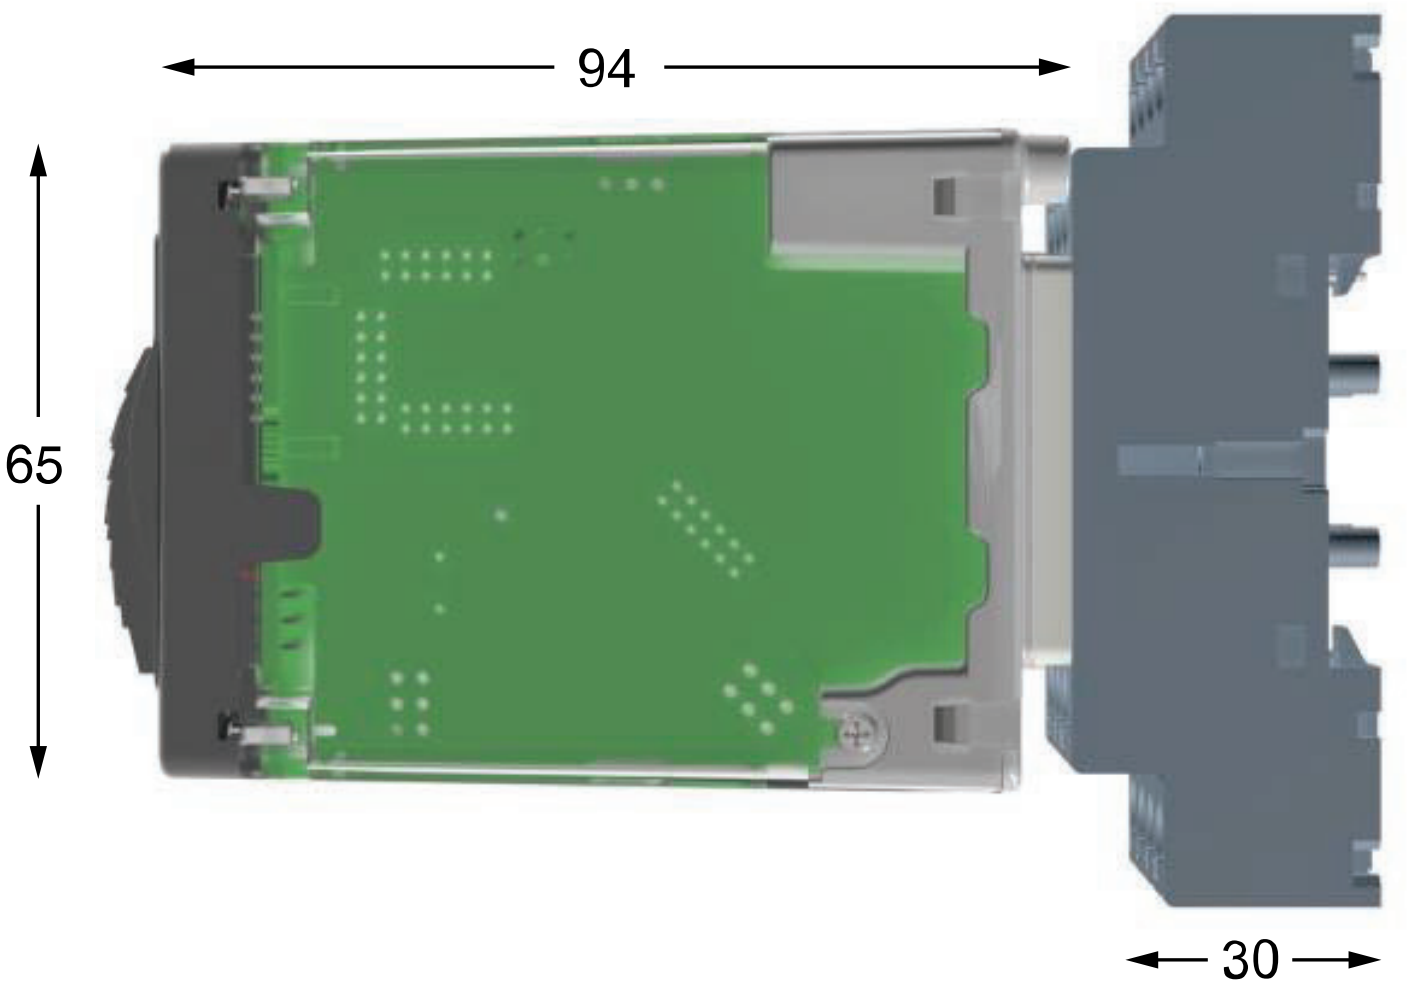

Published on 30 September 2026